Sure Marine Service™

www.suremarineservice.com

Marine Built In Refrigeration

Sure Marine Service, Inc.
5320 28th Ave. N.W.
Seattle, WA 98107
(800) 562-7797 (206) 784-9903

Shop Online:
www.suremarineservice.com

NOVA KOOL

Dometic

isotherm
Marine Refrigeration

NORCOLD

VITRIFRIGO

CRX Series Built-In AC/DC Refrigerators 4
CRX-1050 Series Dometic 1.6CU FT AC/DC Marine Refrigerator 4
Available with Black, Silver, or Stainless Door Panel 4
CRX-1065 Series Dometic 1.9 CU FT AC/DC Marine Refrigerator 5
Available with Black, Silver or Stainless Door Panel 5
CR-1080 Series Dometic 2.6 CU FT AC/DC Marine Refrigerator 5
Available with Black, Silver, or Stainless Door Panel 5
CR-1110 Series Dometic 3.7 CU FT AC/DC Marine Refrigerator 5
Available with Black, Silver, or Stainless Door Panel 5

Isotherm Built-In Refrigerators 6
CRUISE Elegance Line 6
CRUISE Classic & Stainless Steel 9
CRUISE Classic 10
CRUISE Upright Classic 14
CRUISE Stainless Steel 16
CRUISE COMBI LINE 18

Norcold Built-In Refrigerator / Freezers 20
NR0740BB 1.7 Cu. Ft Refrigerator 20
NR0751BB 2.7 Cu. Ft Refrigerator 21
DE-0788 3.1 Cu. Ft Refrigerator / Freezer 22
DE-0041 3.6 Cu. Ft Refrigerator / Freezer 22
DE-0061W 7.0 Cu. Ft Stainless Wrapped Refrigerator 23

Nova Kool Single Door - Under 25” High 24
R1200ACDC - R1200DC - 1.3 Cu. Ft. Refrigerator Only 25
R1600ACDC - R1600DC - 1.3 Cu. Ft. Refrigerator/Freezer 25
R1900ACDC - R1900DC - 1.9 Cu. Ft. Refrigerator/Freezer 26
R2600ACDC - R2600DC - 2.4 Cu. Ft. Refrigerator/Freezer 26
R3000ACDC - R3000DC - 2.5 Cu. Ft. Refrigerator/Freezer 27

Nova Kool Single Door - Over 25” High 28
R2300ACDC - R2300DC - 2.1 Cu. Ft. Refrigerator/Freezer 28
R3100ACDC - R3100DC - 3.0 Cu. Ft. Refrigerator/Freezer 28
R3800ACDC - R3800DC - 3.5 Cu. Ft. Refrigerator/Freezer 29
R3803ACDC - R3803DC - 3.5 Cu. Ft. Refrigerator/Freezer 29
R4500ACDC - R4500DC - 4.3 Cu. Ft. Refrigerator/Freezer 30
R4503ACDC - R4503DC - 4.3 Cu. Ft. Refrigerator/Freezer 30
R580ACDC - R5810DC - 5.8 Cu. Ft. Refrigerator/Freezer 31

Nova Kool Two Door Upright Refrigerator & Freezer 32
RFU6200ACDC - RFU6200DC - 6 Cu. Ft. Refrigerator/Freezer 32
RFU6800ACDC - RFU6800DC - 6.8 Cu. Ft. Refrigerator/Freezer 33
RFU8320ACDC - RFU8320DC - 7.3 Cu. Ft. Refrigerator/Freezer 34
RFU8220ACDC - RFU8220DC - 7.3 Cu. Ft. Refrigerator/Freezer 35
RFU9000ACDC - RFU9000DC - 9.1 Cu. Ft. Refrigerator/Freezer 36

www.SureMarineService.com
5320 28th Ave NW
Seattle, Wa 98107
(800)562-7797 (206)784-9903
© Sure Marine Service 2017

Nova Kool Side By Side Refrigerator 37
RS4600ACDC - RS4600DC - 4.2 Cu. Ft. Refrigerator Only 37
RS6100ACDC - RS6100DC - 5.6 Cu. Ft. Refrigerator Only 37
RS6500ACDC - RS6500DC - 6.4 Cu. Ft. Refrigerator Only 38
RS7600ACDC - RS7600DC - 7 Cu. Ft. Refrigerator Only 38

Nova Kool Side By Side Refrigerator & Freezer 39
RFS6100ACDC - RFS6100DC - 4.2 Cu. Ft. Refrigerator/Freezer 39
RFS6500ACDC - RFS6500DC - 6.4 Cu. Ft. Refrigerator/Freezer 40
RFS7600ACDC - RFS7600DC - 7.5 Cu. Ft. Refrigerator/Freezer 40

Vitrifrigo Refrigerators with Internal Cooling Units 41
C39iBP4-F-1 - 1.3 Cu. Ft. Refrigerator/Freezer 41
C51iBD4-F-1 - 1.8 Cu. Ft. Refrigerator/Freezer 42
C60iBD4-F-1 - 2.1 Cu. Ft. Refrigerator/Freezer 42
C62iBD4-F-1 - 2.2 Cu. Ft. Refrigerator/Freezer 43
C85iBD4-F-1 - 3.2 Cu. Ft. Refrigerator/Freezer 43
C90iBD4-F-1 - 3.1 Cu. Ft. Refrigerator/Freezer 44
C115iBD4-F-1 - 4.2 Cu. Ft. Refrigerator/Freezer 44
C115iBP4-F-1 - 4.2 Cu. Ft. Refrigerator Only 45
DP150iBD4-S - 5.3 Cu. Ft. Refrigerator/Freezer 45
DP2600iBD4-F-2 - 8.1 Cu. Ft. Refrigerator/Freezer 46

Vitrifrigo Refrigerators with Remote Cooling Units 47
C130RBD4-F-1 - 4.7 Cu. Ft. Refrigerator / Freezer 47
C42RBD4-F-1 - 1.4 Cu. Ft. Refrigerator / Freezer 48
C75RBD4-F-1 - 2.6 Cu. Ft. Refrigerator / Freezer 48

Vitrifrigo Stainless Refrigerators with Internal Cooling Units 49
C51iXD4-F - 1.8 Cu. Ft. Stainless Refrigerator/Freezer 49
C60iXD4-F - 2.1 Cu. Ft. Stainless Refrigerator/Freezer 50
C62iXD4-F - 2.2 Cu. Ft. Stainless Refrigerator/Freezer 50
C85iXD4-F - 3.2 Cu. Ft. Stainless Refrigerator/Freezer 51
C90iXD4-F - 3.1 Cu. Ft. Stainless Refrigerator/Freezer 51
C115iXD4-F - 4.2 Cu. Ft. Stainless Refrigerator/Freezer 52
C115iXP4-F - 4.2 Cu. Ft. Stainless Refrigerator Only 52
DP2600iXD4-F-1 - 8.1 Cu. Ft. Stainless Refrigerator/Freezer 53

Vitrifrigo Stainless Refrigerators with Remote Cooling Units 54
C130RXD4-F - 4.7 Cu. Ft. Stainless Refrigerator / Freezer 54
C42RXD4-F - 1.4 Cu. Ft. StainlessRefrigerator / Freezer 55
C75RXD4-F - 2.6 Cu. Ft. Stainless Refrigerator / Freezer 55

© 2020 Sure Marine Service, All Rights Reserved.

The content of this catalog is furnished for informational use only. It is subject to change without notice. Sure Marine Service assumes no responsibility or liability for any errors or inaccuracies that may appear in the content of this catalog.

The text, drawings and other artwork are not to scale and are simply intended to be guides to aid in your selection process. They do not replace installation or owners manuals.

CRX Series Built-In AC/DC Refrigerators

With many innovative features, the CRX is a durable built-in refrigerator that is quiet, flexible and efficient.

Dometic's patented removable freezer—an easy slide-out compartment—transforms the CRX into a refrigerator only, or a freezer only with temperatures going down to 17°F (-8°C). (Not available on the CRX-1110 or CRX-1140)

The CRX is the first marine fridge to have an electronic control panel that fits flush into the side wall to provide more storage space and is within easy reach to operate. An infrared (IR) sensor replaces the less-reliable mechanically activated switch for illuminating the interior. The panel also contains soft-touch buttons for power and temperature setting, a bright LED light for illumination, a power-indicator LED, and an error-indicator LED that flashes system diagnostic codes

Features:

- Patented removable freezer compartment transforms the unit into a larger-capacity refrigerator-only or 17°F (-8°C) freezer-only **(Not available on the CRX-1110 or CRX-1140)**
- Speed-controlled compressor is more efficient and reduces noise
- Large fan overcomes high ambient temperatures
- Bright LED illumination
- Flat electronic control panel
- High-performance tube and fin condenser
- Reliable IR sensor activates bright interior LED light
- nterior mounted electronic thermistor for accurate temperature measurements
- When connected, the built-in drain will eliminate condensate when de-icing and liquids that spill inside the unit
- Black and silver models include a flush-mount (an optional space-saver flange is available). A flange (flush-mount or space-saver) must be ordered separately for stainless steel models.
- Available in black, silver finish, or stainless steel

CRX-1050 Series Dometic 1.6CU FT AC/DC Marine Refrigerator
Available with Black, Silver, or Stainless Door Panel

Refrigerator Gross Capacity: 1.6 cu ft (45 liters)
Voltage: 12/24V DC (110/220V AC)
Power Consumption: 5.0 amps @ 12 Volts
Compressor: Danfoss BD35F
Refrigerant: Environmentally safe R-134A
Color: **Available with**:
Black with Black Finish Door Panel with flush-mount or surface flange[1],
Silver with Silver Finish Door Panel with flush-mount or surface flange[1], **or**
Stainless-steel face panel, flush-mount flange or surface flange (sold separately)[1]

[1] *not all configurations currently available, check availability*

Cut-Out Dimensions:
Flush-mount 21.375" H x 16.125" W x 19.75" D (543mm x 410mm x 502mm) [2]
Space-saver 21.125" H x 15.25" W x 17.5" D (458mm x 527mm x 489mm) [2]

[2] *Flange sold separately for stainless units*

Net Weight: 35.3 lbs (16 kg)

© Sure Marine Service

CRX-1065 Series Dometic 1.9 CU FT AC/DC Marine Refrigerator
Available with Black, Silver or Stainless Door Panel

Refrigerator Gross Capacity: 1.9 cu ft (55 liters)
Voltage: 12/24V DC (110/220V AC)
Power Consumption: 5.5 amps @ 12 Volts
Compressor: Danfoss BD35F
Refrigerant: Environmentally safe R-134A
Color: **Available with**:

Black with Black Finish Door Panel with flush-mount or surface flange[1],
Silver with Silver Finish Door Panel with flush-mount or surface flange[1], **or**
Stainless-steel face panel, flush-mount flange or surface flange (sold separately)[1]

[1] *not all configurations currently available, check availability*

Cut-Out Dimensions:

Flush-mount 21" H x 18.875" W x 21.5" D (534mm x 480mm x 547mm) [2]
Space-saver 20.75" H x 18" W x 19.25" D (527mm x 458mm x 489mm) [2]

[2] *Flange sold separately for stainless units*

Net Weight: 39.7 lbs (18 kg)

CR-1080 Series Dometic 2.6 CU FT AC/DC Marine Refrigerator
Available with Black, Silver, or Stainless Door Panel

Refrigerator Gross Capacity: 2.6 cu ft (73 liters)
Voltage: 12/24V DC (110/220V AC)
Power Consumption: 5.6 amps @ 12 Volts
Compressor: Danfoss BD35F
Refrigerant: Environmentally safe R-134A
Color: **Available with**:

Black with Black Finish Door Panel with flush-mount or surface flange[1],
Silver with Silver Finish Door Panel with flush-mount or surface flange[1], **or**
Stainless-steel face panel, flush-mount flange or surface flange (sold separately)[1]

[1] *not all configurations currently available, check availability*

Cut-Out Dimensions:

Flush-mount 25.5" H x 19.875" W x 21" D (648mm x 505mm x 534mm) [2]
Space-saver 25.5" H x 19" W x 18.75" D (642mm x 483mm x 477mm) [2]

[2] *Flange sold separately for stainless units*

Net Weight: 44.1 lbs (20 kg)

CR-1110 Series Dometic 3.7 CU FT AC/DC Marine Refrigerator
Available with Black, Silver, or Stainless Door Panel

Refrigerator Gross Capacity: 13.7 cu ft (104 liters)
Voltage: 12/24V DC (110/220V AC)
Power Consumption: 6.2 amps @ 12 Volts
Compressor: Danfoss BD35F
Refrigerant: Environmentally safe R-134A
Color: **Available with**:

Black with Black Finish Door Panel with flush-mount or surface flange[1],
Silver with Silver Finish Door Panel with flush-mount or surface flange[1], **or**
Stainless-steel face panel, flush-mount flange or surface flange (sold separately)[1]

[1] *not all configurations currently available, check availability*

Cut-Out Dimensions:

Flush-mount 29.625" H x 21.625" W x 22" D (753mm x 550mm x 559mm) [2]
Space-saver 29.375" H x 20.75" W x 19.75" D (477mm x 527mm x 502mm) [2]

[2] *Flange sold separately for stainless units*

Net Weight: 62 lbs (28 kg)

© Sure Marine Service

CRUISE Elegance Marine Refrigerators

New Isotherm Design for Elegant, Energy-Efficient Refrigerators

In line with our mission to design and build high-quality, energy efficient marine refrigeration systems exclusively for sailing yachts and motor cruisers, Indel Webasto Marine is proud to announce the new Isotherm Cruise Elegance line of marine refrigerators.

High performance and low power draw are critical in the marine environment. New Cruise Elegance Refrigerators have extra insulation and a freezer design that reduces battery consumption and results in superior performance.

Cruise Elegance Marine refrigerators are available in four sizes: 42, 49, 65, 85, 115 and 130 liters volume which are the most common sizes used on boats. The Elegance Line offers infinite design opportunities as the door panel and the handle can be customized to the boat builders design requirements. With a flange-free mounting capability, designers can create clean, innovative modern interiors that appeal to boat buyers.

The Ultimate Combination of Style and Technology!

- **6 volumes: 42, 49, 65, 85, 115 and 130 liters**
- **Ready for Isotherm Smart Energy Control**
- **Easy fit installation solutions**
- **Customizable door panel and handle**
- **Superior Reliability: Danfoss / Secop compressors backed by Isotherm's 5-year limited warranty**
- **Extra-thick insulation for low power consumption**
- **New freezer design reduces frosting issues and has magnetic door holder for easy access**
- **Blue LED internal lighting**
- **Innovative vent-lock system**

Elegance in Design and Construction!

The isotherm Cruise Elegance Line of Marine Refrigerators are more than handsome fridges that add value to every instalation, they have an engineered elegance that addresses the major concerns of boaters like energy-efficiency, performance, and space savings:

Extra-thick insulation in the two inch thick doors provides greater insulating properties for superior performance and reduced run time of the compressor for greater efficiency. The Isotherm Cruise Elegance also features a new freezer design that reduces frosting issues yet maintains a minimum footprint for greater capacity of storage for refrigerated foods, beverages, and tall bottles. The new Isotherm Cruise Elegance freeezer compartment also features a magnetic door that holds open for easy access.

The innovative Isotherm Elegance internal anchoring system eliminates the need for a flange which gives boaters a way to fit a fridge in tighter locations and offers designers new ways to incorporate clean, modern designs.

The new Elegance Black will replace the Classic models in the 42, 49, 65, 85, and 130 liter.sizes (except DRINK models)

Product highlights:

- **The new, wider handle is easy to operate and allows central location for easy change to right or left swing**
- **Door panel and handle can be customized with standard teak, mahogany, and white panels**
- **Custom design panel options are available to boat builders.**
- **Branding/Logo on handle can be provided as an option for boat builders and designers**

www.SureMarineService.com
5320 28th Ave NW
Seattle, Wa 98107
(800)562-7797 (206)784-9903

© Sure Marine Service

CRUISE Elegance Line

CRUISE Elegance Features

Easy fit installation solution

A new flange-free installation system allows secure anchoring of the cabinet directly from the interior of the fridge. The external flange is no longer necessary for fixing the fridge, freeing up space for new design options. An innovative internal bushing structure facilitates secure anchoring while protecting the insulated side walls.

Vent-lock system

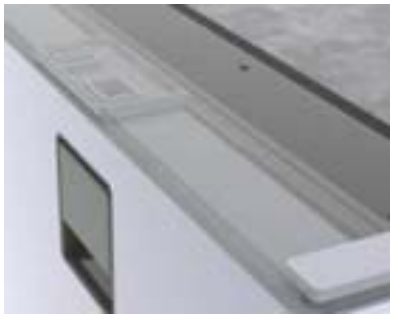

With a simple slide of the invisible locking mechanism, CRUISE Elegance fridges can be placed in ventilation mode for long-term storage. The unique design keeps the door ajar while the boat is not being used so the fridge will remain odor-free.

CRUISE Elegance refrigerators are pre-configured for the optional Isotherm Smart Energy Control

All CRUISE Elegance fridges have been prepared and tested for the installation of the new Isotherm Smart Energy Control kit which reduces battery consumption by up to 50 percent."The location of the sensor is molded in the cabinet interior for easy upgrade.

Model	Volume cubic feet	Dimensions H x W x D inches	Weight lbs	Power consumption W/24 hours	Danfoss / Secop compressor type	Freezer 21° F temp volume liters
CR EL 42	1.5 cf	20.7 x 15 x 12.6***	33	285****	BD1.45F	4
CR EL 49	1.75 cf	20.7 x 15 x 17.6*	35	265**	BD35F	4
CR EL 65	2.3 cf	20.9 x 17.7 x 18.5*	38	275**	BD35F	4
CR EL 85	3.0 cf	24.7 x 18.7 x 19.7*	46	368**	BD35F	6
CR EL 130	4.6 cf	29.6 x 20.7 x 19.5*	55	418**	BD35F	6
FREELINE 115 EL	4.1 cf	31.4 x 20.7 x 19.5*	71	267	BD35F	32

*Depth does not include door - door is 2 inches ** Power consumption can be reduced by up to 50 % with the use of an Isotherm Smart Energy Control Kit
***With compressor remotely mounted ****EL42 Micro electronics will not fit ISEC module pin terminals

© Sure Marine Service

CRUISE Elegance Line

CRUISE Elegance 42

The CR 42 EL is the smallest fridge of the new CRUISE Eleganceline. The CR42EL features a BD Micro remote-mount compressorwhich can be mounted up to 3 feet away and reducee thedepth to 12.6 inches for proud mount or 14.6 inches for flushmount. (Add 6 inches if compressor remains mounted on back)The internal anchoring system allows this versatile fridge to beinstalled with or without a flange like all Elegance fridges.



Isotherm CRUISE EL 42	
Model	CR 42 EL
Volume	1.5 cf

CRUISE Elegance 49

The CR 49 EL is the smallest fridge of the new CRUISE Elegance line. The fridge features a food grade, one piece inner lining with one adjustable shelf and two removeable door shelves. The innovative freezer compartment has a volume of 4 liters and is right-sized which allows tall bottles to be stored upright in this small fridge - perfect for champagne or wine!



Isotherm CRUISE EL 49	
Model	CR EL 49
Volume	1.75 cf

CRUISE Elegance 65

The CR 65 EL fridge is one of the most common sized fridges used on boats today. Upgrading to the energy efficient Isotherm Elegance is easy for boat owners with old fridges thanks to the innovative anchoring system. The CR 65 EL has one adjustable shelf and two rugged, molded-in door shelves with cradles and adjustable holders that keep jars and bottles upright and secure. It also features a freezer compartment with a volume of 4 liters.



Isotherm CRUISE EL 65	
Model	CR EL 65
Volume	2.3 cf

CRUISE Elegance 85

The CR 85 EL provides the customer a 6 liter freezer compartment, two adjustable interior shelves and two rugged, molded-in door shelves. The CR 85 EL is ready for the Isotherm Smart Energy Control, like all other CRUISE Elegance fridges.



Isotherm CRUISE EL 85	
Model	CR EL 85
Volume	3.0 cf

© Sure Marine Service

CRUISE Elegance 130

The CR 130 EL is the highest volume fridge in its class and fits the footprint of similar competitor fridges. The Cruise 130 Elegance features a separate freezer compartment with a volume of 6 liters, two adjustable interior shelves and three molded-in door shelves for maximum storage of refrigerated supplies. It is equipped with a vegetable bin covered by a tempered safety glass shelf.



Isotherm CRUISE EL 130	
Model	CR EL 130
Volume	4.6 cf

FREELINE 115 Elegance

The Freeline Elegance 115 was designed to deliver maximum storage volume at minimum battery consumption. The Freeline 115 Elegance features a large freezer compartment with a volume of 32 liters, two adjustable interior shelves and two molded-in door shelves for maximum storage of refrigerated supplies. It is equipped with a vegetable bin and a bottom-mount compressor.



Isotherm FREELINE 115 EL	
Model	Freeline 115 EL
Volume	4.1 cf

CRUISE Classic & Stainless Steel Marine Refrigerators

Superior Performance and Reliability with Innovative Isotherm Design

Isotherm CRUISE Refrigerators combine technological innovation with sophisticated, yet practical design. "The CRUISE Classic refrigerators are available from 36 liters up to 320 liters and provide numerous customization options. Models are named after their internal volume in liters.

CR130 Stainless Steel interior

Extremely robost yet handsome design with superior performance.

Standard features of the CRUISE line include

- **Interior light**
- **Mounting frame (flange) included with each unit for easy installation**
- **Low power consumption**
- **12 / 24 Danfoss / Secop compressor**
- **AC / DC and DC - only models work with all power supplies commonly used worldwide:115 & 230 volts AC (50 & 60 Hz.) and 12 & 24 volts DC**
- **Door with a positive latching handle and magnetic rubber seals**
- **Corner-mount, air cooled compressors and right sized freezer compartments allow maximum storage of refrigerated supplies**
- **Remote mount compressor on CR36, 40 CUBE, and 42 allow for easy fit in tight locations**
- **One piece inner lining of food-quality, high density plastic that resists absorbing oders.**
- **Molded door shelves for superior strength**
- **Integrated bottle and jar cradles keep supplies secure**
- **Adjustable sliders on door shelves keep bottles upright**
- **Hatches in shelves allow upright storage of tall bottles**

© Sure Marine Service

CRUISE Classic Marine Refrigerators

New Cruise Line changes or 2018:

- Stainless Steel 42, 49, 65, 85, and 130 models (except DRINK models) will be replaced by the new Clean Touch SS.
- New Clean Touch Stainless Steel models feature a new high-tech finish that protects against abrasion, stains, sun, salt, and UV in the marine evnironment.
- Classic 42, 49, 65, 85, & 130 models (except DRINK models) will be replaced by the new Elegance Black.
- Right or Left Swing as well as field changeable swing in both the new Elegance Black & the Clean Touch SS.
- Customizable frame designs

Product Overview: Isotherm CRUISE Marine Refrigerators

Model	Volume cubic feet	Dimensions H x W x D inches	Weight lbs	Power consumption W/24 hours	Danfoss / Secop compressor type	Freezer volume liters (temperature)
CR 40 CUBE (dual temp)	1.4 cf	17 x 17 x 17*	42	186	BD35F	40 (10° F)
CR 42 Elegance Black	1.5 cf	20.8 x 15 x 12.6*	35	340	BD35F	4 (21° F)
CR 42 Clean Touch SS	1.5 cf	20.8 x 15.75 x 14.2*	38	285	BD1.4F	4 (21° F)
CR 49 Elegance Black	1.75 cf	20.8 x 15 x 17.8	35	340	BD35F	4 (21° F)
CR 49 Clean Touch SS	1.75 cf	20.8 x 15.7 x 19.7	40	265	BD35F	4 (21° F)
CR 65 Elegance Black	2.3 cf	20.8 x 17.7 x 18.5	40	360	BD35F	4 (21° F)
CR 65 Clean Touch SS	2.3 cf	20.8 x 18.5 x 21.4	44	275	BD35F	4 (21° F)
CR 85 Elegance Black	3.0 cf	24.6 x 18.7 x 19.7	44	380	BD35F	6 (21° F)
CR 85 Stainless Steell	3.0 cf	24.6 x 19.5 x 21.7	53	368	BD35F	6 (21° F)
CR 90 BIG	2.5 / 0.7 cf	33.5 x 18.7 x 16.8	64	520	BD35F	20 (0° F)
CR 100	3.5 cf	29.3 x 19.1 x 17.9	46	400	BD35F	5 (21° F)
CR 130 Elegance Black	4.6 cf	29.6 x 21.4 x 19.5	51	400	BD35F	6 (21° F)
CR 130 Clean Touch SS	4.6 cf	29.6 x 21.5 x 21.8	60	400	BD35F	6 (21° F)
CR 130 DRINK Classic	4.6 cf	29.6 x 21.4 x 19.9	51	400	BD35F	fridge only
CR 130 DRINK SS	4.6 cf	29.6 x 21.4 x 21.4	60	400	BD35F	fridge only
CR 160 DRINK SS	5.5 cf	34 X 24.6 X 23.4	60	400	BD50F	fridge only
CR 165 Upright Silver	4.4 / 1.4 cf	48 x 19.7 x 20.3	86	600	BD50F	40 (0° F)
CR 195 Combi Classic	4.6 / 2.3 cf	52.9 x 21.4 x 22	93	830	2 X BD35F	65 (0° F)
CR 195 Combi SS	4.6 / 2.3 cf	52.9 x 21.4 x 22	98	830	2 X BD35F	65 (0° F)
CR 200 Classic	5.2 / 1.8 cf	34.7 x 28.9 x 24.3	79	800	BD50F	50 (10° F)
CR 200 Stainless Steel	5.2 / 1.8 cf	34.7 x 28.9 x 24.3	84	800	BD50F	50 (10° F)
CR 219 Upright Silver	6.6 / 1.5 cf	57 x 21.7 x 21.5	75	600	BD50F	50 (0° F)
CR 220 Combi SS	4.6 / 3.2	60.8 x 21.4 x 22	152	400 + 550	2 x BD35F	90 (0° F)
CR 260 Combi SS	4.6 / 4.6	60.8 x 21.4 x 22	163	400 + 429	2 x BD35F	20 (21° F)
CR 271 Upright Silver	7.7 / 1.9 cf	65 x 21.7 x 20.5	112	800	BD50F	46 (0° F)
CR 320 Combi SS Fridge/Fridge Fridge/Freezer Freezer/Freezer Fridge/Freezer/Ice Maker	5.5 / 5.5	70.5 x 24.7 x 24	209	 512 + 530 512 + 635 512 + 1100 512 + 1600	 2 x BD50 BD50 + BD80 BD50 + BD80 BD50 + AC COMP.	 80 (15° F) 160 (15° F) 80 (15° F)

*Depth with compressor remote mounted (add 6.5 inches if compressor mounted to box) Dimensions are cut-out dimensions

All Stainless Steel products are flush mounted. All Classic products are proud mounted (door stands out from cabinet face which reduces installation depth).

Power consumption W / 24 Hours in operation on 12 Volt with +41°F in the refrigeration space, ambient temperature +77 °F

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 40 CUBE

The CR 40 CUBE can be installed either as a front opening fridge or freezer (Cruise) and / or as a top opening fridge or freezer (Built-In box). With its range in temperatures from fridge to freezer, side or top loading, and remote-mount compressor (up to 4.9 feet away), this is a versatile refrigerator or freezer that can extend a boat's storage capacity for long-distance cruising or chartering. Combine them top and bottom or side-by-side for extra storage.



Isotherm CRUISE 40 CUBE	
Model	CR 40 CUBE
Volume	1.4 cf

CRUISE 42 Elegance Black

The CR42 Elegance Black is a new model that will be the replacement for the Cruise 42 Classic. The CR42 EL Black has the new BD1.4F compressor on a remote mountable bracket which allows the fridge to fit into shallow depth while keep-ing 1.5 cu. ft. of storage space for food and bottles standing upright withing the refrigerator. The CR42 Elegance Black is equipped with installation frame and interior light "(Depth is reduced by 6.2 inches when compressor is remotely mounted)



Isotherm CRUISE 42 Elegance Black	
Model	CR 42 Elegance Black
Volume	1.5 cf

CRUISE 49 Elegance Black

The CR49 Elegance Black is a new model that will be the replacement for the Cruise 49 Classic. Both share the same dimensions with a built-in compressor giving larger inside storage space for food and beverage supplies. The CR49 Elegance Black is equipped with installation frame and interior light.



Isotherm CRUISE 49 Elegance Black	
Model	CR 49 Elegance Black
Volume	1.75 cf

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 65 Elegance Black

The CR65 Elegance Black is a new model that will replace the Cruise 65 Classic. The CR65 features a separate freezer compartment and a built-in compressor. The CR65 has moulded cradles on the door and adjustable holders to keep jars and bottles upright and secure, even in the roughest conditions. "It comes equipped with installation frame and interior light as standard.



Isotherm CRUISE 65 Elegance Black	
Model	CR 65 Elegance Black
Volume	2.3 cf

CRUISE 85 Elegance Black

The CR 85 Elegance Black is a new model that will replace the CR 85 Classic. The CR 85 comes with a freezer compartment, two adjustable shelves and a corner mounted compressor. The CR 85 is equipped with interior light as standard. Installation frames are available as an option. The Cruise 85 matches up with the Cruise 63 Freezer for a companion fridge & freezer installation



Isotherm CRUISE 85 Elegance Black	
Model	CR 85 Elegance Black
Volume	3.0 cf

CRUISE 90 BIG

The CRUISE 90 is a new two door fridge-freezer solution that gives the boater a separate, small freezer on top and refrigerator on the bottom. The refrigerator has a volume of 2.5 cubic feet and the freezer is larger for a fridge of this class with a volume of 0.7 cu. ft. The refrigerator is equipped with inner light and room for tall bottles on the shelves and interior.



Isotherm CRUISE 90 BIG	
Model	CR 90 BIG
Volume	3.2 cf

CRUISE 100

The CR 100 differentiates itself with integrated air ducts and fan ventilated compressor which permits air circulation even in tight installations. Additional mounting frames are available as an option.



Isotherm CRUISE 100	
Model	CR 100
Volume	3.5 cf

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 130 DRINK Classic

The CR 130 DRINK is a special version of the CR 130 providing the customer with extra space for drinks instead of the freezer compartment. Bottle racks (as shown on the picture) are optional. The CR130 DRINK has an innovative built-in condensation system that makes it virtually frost-free by pulling air across the evaporator and draining condensation out of the fridge into an evaporation tray on the back of the fridge



Isotherm CRUISE 130 DRINK	
Model	CR 130 DRINK
Volume	4.6 cf

CRUISE 130 Elegance Black

The CR 130 is a traditional fridge with a freezer compartment, three shelves, a vegetable bin and a door divided into three sections. It is equipped with inner light and a fan-cooled compressor as standard. The CR130 is the perfect under-thecounter fridge with large capacity and comes with a black proud mount flange. Available with ASU



Isotherm CRUISE 130 Elegance Black	
Model	CR 130 Elegance Black
Volume	4.6 cf

Isotherm CRUISE 200 installed in Galley with optional wood panels

CRUISE 200 Classic

The CR 200 Classic is a stylish fridge-freezer with panel door design that offers spacious on board storage for fresh and frozen foods. Fitting neatly under the counter, the CR 200 has a large a 5.3 cu. ft fridge with three shelves on the door, cold-cuts tray, 3 bottle wine caddy, and vegetable crispers as well as a 1.8 cu. ft freezer section with wire shelves and a storage bin.



Isotherm CRUISE 200 Classic	
Model	CR 200 Classic
Volume	5.3 cf + 1.8 cf

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 195 Classic

The CR 195 Classic is a unique two door fridge-freezer solution with the refrigerator on top and freezer on the bottom. Fridge on top gives boaters ergonomic access to refrigerated supplies without having to bend over. The CR195 is equipped with two fan-cooled compressors, separate thermostats for the fridge and freezer sections, a flush mounting frame, inner light, and a vegetable bin.



Isotherm CRUISE 195 Classic	
Model	CR 195 Classic
Volume	4.6 cf + 2.3 cf

CRUISE 165 Silver

The CR 165 refrigerator/freezer has a compact design with easy change swing from right to left. The Cruise Upright Classic fridges feature the freezer on top and have a finished exterior on the top and sides which makes them perfect for freestanding installations. The CR 165 features a fridge with a volume of 4.4 cubic feet and the freezer with a volume of 1.4 cubic feet. The fridge is equipped with interior light, three shelves, vegetable bins, and AC/DC functionality.



Isotherm CRUISE 165	
Model	CR 165 White Line
Volume	4.4 cf + 1.4 cf

www.SureMarineService.com
5320 28th Ave NW
Seattle, Wa 98107
(800)562-7797 (206)784-9903
© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 219 Silver

The CR 219 is a large two-door fridge-freezer solution perfect for live-aboards that require extra storage. The refrigerator provides a volume of 6.6 cubic feet and the freezer a volume of 1.45 cubic feet. The refrigerator is equipped with interior light, 3 shelves and a vegetable bin at the bottom and AC/DC functionality.. New silver color.



Isotherm CRUISE 219	
Model	CR 219
Volume	6.3 cf + 1.45 cf

CRUISE 271 Silver

The CR 271 is the largest fridge in the Isotherm family and is perfect for off-grid solar homes, houseboats, and vacation cottages. The refrigerator provides a volume of 7.7 cubic feet and the freezer a volume of 1.9 cubic feet. The refrigerator is equipped with interior light, five shelves and a vegetable bin at the bottom. The CR271 works on all power sources world wide and has a new silver color.



Isotherm CRUISE 271	
Model	CR 271
Volume	7.7 cf + 1.9 cf

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 42 Clean Touch Stainless Steel

The new CR 42 Clean Touch Stainless Steel features a high-tech coating which protects the doors against fingerprints, stains, minor abrasion, UV, salt, and sun. With a thicker door, the Clean Touch holds the cold better. The CR 42 has the capability for the compressor unit to be removed from the back and mounted in any vertical position up to 3 feet away. "(Depth is reduced by 6.2 inches when compressor is remotely mounted)



Isotherm CRUISE 42 Clean Touch SS	
Model	CR 42 Clean Touch Stainless Steel
Volume	1.5 cf

CRUISE 49 Clean Touch Stainless Steel

The CR 49 Stainless Steel features a high-tech coating which protects the doors against fingerprints, stains, minor abrasion, UV, salt, and sun. With a thicker door, the Clean Touch holds the cold better. The CR 49 is also available as the DR 49 drawer model.



Isotherm CRUISE 49 Clean Touch SS	
Model	CR 49 Clean Touch Stainless Steel
Volume	1.75 cf

CRUISE 65 Clean Touch Stainless Steel

The CR 65 Clean Touch Stainless Steel features stainless steel door, handle and flange as well as interior accents like freezer door and shelf retainers which make this an elegant small refrigerator. Door cradles and adjustable holders keep bottles and jars upright and secure. The Cruise 65 is equipped with installation frame and interior light standard. The CR 65 is also available as the DR 65 drawer model



Isotherm CRUISE 65 Clean Touch SS	
Model	CR 65 Clean Touch Stainless Steel
Volume	2.3 cf

© Sure Marine Service

CRUISE Classic Marine Refrigerators

CRUISE 85 Clean Touch Stainless Steel

The CR 85 Stainless Steel has the door and interior accents including freezer door and shelf retainers in stainless steel. The CR85 has a freezer compartment, two adjustable shelves and a corner-mounted compressor. Interior light and flush mount mounting flange are standard. The CR85 matches up the Cruise 63 Freezer for a side-by-side installation for fridge and freezer. The CR 85 is also availabe as the DR 85 drawer.



Isotherm CRUISE 85 Clean Touch SS	
Model	CR 85 Clean Touch Stainless Steel
Volume	3.0 cf

CRUISE 130 Clean Touch Stainless Steel

The CR 130 Clean Touch Stainless Steel features a high-tech coating which protects the doors against fingerprints, stains, minor abrasion, UV, salt, and sun. With a thicker door, the Clean Touch holds the cold better. The CR130 has three interior shelves, vegetable bin, and stainless steel accents on the freezer compartment door and shelf retainers. Very elegant! "The CR130 is also available as a DR 130 drawer.



Isotherm CRUISE 130 Clean Touch SS	
Model	CR 130 Clean Touch Stainless Steel
Volume	4.60 cf

CRUISE 130 DRINK Stainless Steel

The CR 130 D Stainless Steel is the stainless steel design version of the CR 130 D providing the customer with an extra space for drinks instead of the freezer compartment. It is equipped with inner light and a fan-cooled compressor as standard. The CR130 Drink pairs up with the Cruise 90 Freezer for the perfect combination of large fridge and freezer that can be installed under the counter or stacked.



Isotherm CRUISE 130 DRINK Stainless Steel	
Model	CR 130 DRINK Stainless Steel
Volume	4.6 cf

CRUISE 160 DRINK Stainless Steel

The CR 160 DRINK Stainless Steel uses the same innovative cooling technology as the CR 130 DRINK which allows extra space for beverages and does not have a freezer section. The DRINK design captures moisture which results in frost and directs it out of the interior into an exterior evaproation tray. The 160 DRINK has the same outside dimensions as the 160 Drawer with extra large storage that fits neatly under a standard countertop.



Isotherm CRUISE 130 DRINK Stainless Steel	
Model	CR 130 DRINK Stainless Steel
Volume	4.6 cf

© Sure Marine Service

COMBI LINE Stainless Steel Refrigerators

CRUISE COMBI LINE

CRUISE 200 Stainless Steel

The CR 200 Stainless Steel is a stylish fridge-freezer in stainless steel design that offers spacious on board storage for fresh and frozen foods. Fitting neatly under the counter, the CR 200 has a large a 5.3 cu. ft fridge with three shelves on the door, cold-cuts tray, 3 bottle wine caddy, and vegetable crispers as well as a 1.8 cu. ft freezer section with wire shelves and a storage bin.

Combi Line

Combining Proven Performance with Greater Volume



Isotherm CRUISE 200 Stainless Steel	
Model	CR 200 Stainless Steel
Volume	5.3 + 1.8 cf

CRUISE 195 COMBI and CRUISE 220 COMBI Stainless Steel

The CR 195 Stainless Steel is a two door fridge-freezer solution combining a 4.6 cu. ft. refrigerator on top and a 2.3 cu. ft freezer on the bottom. The Cruise 220 COMBI has a 3.1 cubic foot freezer. Each model has two compressors which give them the horsepower to keep boaters happy with proper temperatures in the fridge and 0° F temperatures in the deep freezer



Isotherm CRUISE 195 COMBI Stainless Steel	
Model	CR 195 COMBI Stainless Steel
Volume	4.6 + 2.3 cf



Isotherm CRUISE 220 COMBI Stainless Steel	
Model	CR 220 COMBI Stainless Steel
Volume	4.6 + 3.2 cf

© Sure Marine Service

CRUISE 260 COMBI Stainless Steel

The CR 260 COMBI Stainless Steel is a 130 liter door fridge on on top of a 130 liter drawer refrigerator for a total of 9.2 cubic feet of marine refrigeration solution The CR 260 has the DRINK fridge on top and a drawer fridge on the bottom. The drawer fridge has an internal 4 gallon drawer freezer to provide a local freezer capacity.



Isotherm CRUISE 260 COMBI Stainless Steel	
Model	**CR 260 COMBI Stainless Steel**
Volume	**4.6 + 4.6 cf**

CRUISE 320 COMBI Stainless Steel

The CR 320 Combi Stainless is an hybrid modular unit, that joins large capacity with practical and stylish appearance. A new Cruise 160 Drink is positioned on the top, with a double drawer unit located at the bottom. Like current DR160 configurations, the bottom draw-ers of can be specified in four versions: both drawers as fridge, both drawers as freezer, one drawer fridge and the other freezer and fridge-freezer with integrated Ice Maker. An elegant flush mounting flange surrounds both units into one easy to install plug and play solution.



Isotherm CRUISE 320 COMBI Stainless Steel	
Model	**CR 320 COMBI Stainless Steel**
Volume	**5.5 + 5.5 cf**

© Sure Marine Service

2 cu. ft.

NR740

Panel Door Models

- NEW – Danfoss BD35 compressor improves performance, especially at higher ambient temperatures
- NEW – LED interior light
- Improved styling – new "hidden" ventilation grill
- Fewer SKUs helps streamline your product mix
- Fits the same cutout as the old 0740 model
- Base model is 12/24V DC – Optional Power Cord allows for AC operation
- Closing freezer door
- Can be flush- or proud-mounted without additional hardware
- Self-venting – a Norcold exclusive
- 2-Year Warranty

Stainless

BB = Black panel
SS = Stainless panel

Stainless

Black

Power Cords

SKU #	Voltage	Description	Wt (lb)
635591	120V	US AC Power Cord	2
635592	220V	EU AC Power Cord	2
635593	220V	AUS AC Power Cord	2

		Amp Draw					Proud / Flush W x H x D (D)	
New SKU #	Old SKU #	12VDC	24VDC	120VAC	220V	Information	Installation Dimension	Carton Wt (lb)
NR740BB	DC0740BB	2.5	1.3	—	—	Black Trim and Black Insert Panel	15.25 x 20.5 x 17.84 (19.96)	50
NR740BB	DE0740BB	3.0	1.5	0.70	—	**Add a 635591** 120V US Power Cord	15.25 x 20.5 x 17.84 (19.96)	50
NR740BB	EV0740BB	2.5	1.3	—	0.37	**Add either a 635592** 220V EU Power Cord **or 635593** Australian Power Cord	15.25 x 20.5 x 17.84 (19.96)	50
NR740SS	DC0740SS	2.5	1.3	—	—	Stainless Trim and Stainless Insert Panel	15.25 x 20.5 x 17.84 (19.96)	50
NR740SS	DE0740SS	3.0	1.5	0.70	—	Add **a 635591** 120V US Power Cord	15.25 x 20.5 x 17.84 (19.96)	50
NR740SS	EV0740SS	2.5	1.3	—	0.37	**Add either a 635592** 220V EU Power Cord **or 635593** Australian Power Cord	15.25 x 20.5 x 17.84 (19.96)	50

www.SureMarineService.com
5320 28th Ave NW
Seattle, Wa 98107
(800)562-7797 (206)784-9903
© Sure Marine Service

3 cu. ft.

NR751

Panel Door Models

- NEW – Danfoss BD35 compressor improves performance, especially at higher ambient temperatures
- NEW – LED interior light
- Improved styling – new "hidden" ventilation grill
- Fewer SKUs helps streamline your product mix
- Fits the same cutout as the old 0751 model
- Closing freezer door
- Base model is 12/24V DC – Optional Power Cord allows for AC operation
- Self-venting – a Norcold exclusive
- 2-Year Warranty

Stainless

BB = Black panel
SS = Stainless panel

Stainless

Black

		Amp Draw					Proud W x H x D / Flush (D)	
New SKU #	Old SKU #	12VDC	24VDC	120VAC	220V	Information	Installation Dimension	Carton Wt (lb)
NR751BB	DC0751BB	2.5	1.3	—	—	Black Trim and Black Insert Panel	18.5 x 20.5 x 21.06 (23.19)	63
NR751BB	DE0751BB	3.0	1.5	0.70	—	**Add a 635591** 120V US Power Cord	18.5 x 20.5 x 21.06 (23.19)	63
NR751BB	EV0751BB	2.5	1.3	—	0.37	**Add either a 635592** 220V EU Power Cord **or 635593** Australian Power Cord	18.5 x 20.5 x 21.06 (23.19)	63
NR751SS	DC0751SS	2.5	1.3	—	—	Stainless Trim and Stainless Insert Panel	18.5 x 20.5 x 21.06 (23.19)	63
NR751SS	DE0751SS	3.0	1.5	0.70	—	Add **a 635591** 120V US Power Cord	18.5 x 20.5 x 21.06 (23.19)	63
NR751SS	EV0751SS	2.5	1.3	—	0.37	**Add either a 635592** 220V EU Power Cord **or 635593** Australian Power Cord	18.5 x 20.5 x 21.06 (23.19)	63

AC = Alternating Current (US/Canada): 120 Volts @ 60 hz
DC = Direct Current: 12 or 24 Volts
EV = European Voltage: 230 Volts AC @ 50 hz

Power Cords

SKU #	Voltage	Description	Wt (lb)
635591	120V	US AC Power Cord	2
635592	220V	EU AC Power Cord	2
635593	220V	AUS AC Power Cord	2

© Sure Marine Service

3.1 cu. ft.

DC-0788/DE-0788/EV-0788

- Combination Refrigerator/Freezer
- Self venting capability
- Flush, undercounter mounting
- Black or stainless finish
- 2-year warranty

AC = Alternating Current (US/Canada): 120 Volts @ 60 hz
DC = Direct Current: 12 or 24 Volts
EV = European Voltage: 230 Volts AC @ 50 hz
B = Black panel
S = Stainless panel

		Amp Draw				(W x H x D)		
SKU #	Information	12VDC	24VDC	120VAC/60Hz	230V/50Hz	Installation Dimension	Color	Carton Wt (lb)
DC0788B		3.0	1.5	–	–	20.5 x 30 x 20.125*	Black Panel	62
DE0788B		3.0	1.5	0.80	–	20.5 x 30 x 20.125*	Black Panel	62
EV0788B	AU/NZ Certified	3.0	1.5	–	0.42	20.5 x 30 x 20.125*	Black Panel	62
DC0788S		3.0	1.5	–	–	20.5 x 30 x 20.125*	Stainless Panel	62
DE0788S		3.0	1.5	0.80	–	20.5 x 30 x 20.125*	Stainless Panel	62
EV0788S	AU/NZ Certified	3.0	1.5	–	0.42	20.5 x 30 x 20.125*	Stainless Panel	62

** Depth increases by 1.75" if installed with doors flush to the cabinet*

3.6 cu. ft.

DE-0041/EV-0041

- Now with Danfoss Compressor
- Convenient top-mounted automatic temperature control
- Self-ventilated design for easier integration
- Contemporary Flushmount™ styling
- Black exterior trim with optional door panel
- Reversible doors with adjustable bins for various container sizes
- Convenient, easily-accessible large-container storage
- 12-volt fan aids airflow for improved cooling
- 2-year warranty

		Amp Draw				(W x H x D)		
SKU #	Information	12VDC	24VDC	120VAC/60Hz	230V/50Hz	Installation Dimension	Color	Carton Wt (lb)
DE0041	Flush Mounted	5.4	2.2	0.60	–	23.25 x 30.875 x 23.5	Black Trim	80

© Sure Marine Service

7.0 cu. ft.

DE-0061/EV-0061

- Now with Danfoss Compressor
- Top-of-the-line, two door model
- Contemporary Flushmount™ styling
- Self-ventilated design for easier integration
- Exceptionally quiet, hermetically-sealed compressor
- Drip tray drain hose*
- 12-volt fan aids airflo and compressor for
- Reversible doors
- Black exterior trim w
- Storage for varied si 1/2-gallon and gallon
- Adjustable, removable, large door bin storage
- 2-year warranty

NO LONGER AVAILABLE

* *A 5-foot Extension Accessory Kit is available for the Drip Tray Drain Hose, Norcold Part #625127*

		Amp Draw				(W x H x D)		
SKU #	Information	12VDC	24VDC	120VAC/60Hz	230V/50Hz	Installation Dimension	Color	Carton Wt (lb)
EV0041	AU/NZ Certified Flush Mounted	2.5	1.2	–	0.37	23.25 x 30.875 x 23.5	Black Trim	80
DE0061	Flush Mounted	5.4	2.2	0.90	–	23.25 x 52.875 x 23.75	Black Trim	114
EV0061	AU/NZ Certified Flush Mounted	4.2	2.1	–	0.70	23.25 x 52.875 x 23.75	Black Trim	114

DE = Dual Electric: AC (Alternating Current US/Canada, 120 Volts @ 60 hz) AND DC (Direct Current, 12 or 24 Volts)

EV = European Voltage (230 Volts AC @ 50 hz) AND DC (Direct Current, 12 or 24 Volts)

© Sure Marine Service

Nova Kool

Nova Kool Mfg., has been manufacturing quality refrigeration products in the Pacific Northwest for well over 30 years now. Nova Kool continues to focus their product offering to the mobile and off power grid applications. Innovation has helped them expand their product offering to include more than 20 distinctive models, many of these models are a direct result of customer's feedback. The current offering includes single door units from 0.8 cu.ft. to 5.8 cu.ft., double door units from 4.2 cu.ft. up to 9.1 cu.ft. and also their LT series of icebox conversion kits. Nova Kool prides itself on being the easiest in the industry to do business with, continually providing their customers with timely information, products and services.

Nova Kool Quality Statement
"Strive for continual improvement of all business processes while involving all associates in the management of quality and to consistently supply conforming products that meet or exceed customer requirements"

Features:

- •Whisper Quiet
- •Danfoss BD Compressor.
- •Low Power Consumption.
- •Low Voltage Battery Protection, to guard against full battery discharge.
- •Left or Right Door Opening.
- •Removable Door Panel.
- •Stainless Steel Hardware.
- •Designed for
- •Mobile
- •Applications on grades up to 30° angle.
- •Positive Latching System.
- •Multi Voltage Design
  12, 24 VDC,
  100-240 50-60 HzVAC.

Options

1. All refrigerator (no freezer compartment)
2. Chine hugger (moves compressor up and out of the way)
3. Light
4. White or Stainless steel panels (standard is black)

Features:

Strong and efficient Evaporator Plates

Positive Latching

Smart Flip UP Shelves

Accurat Thermostats

Efficient Reciprocating Compressor

© Sure Marine Service

R1200

R1200ACDC - R1200DC - 1.3 Cu. Ft. Refrigerator Only

Designed to replace some common Ice Maker cut outs. The R1200 unit will hold wine bottles as well as cans of beverage. The 1200 does not have a freezer compartment; this allows more room for beverages.

The mounting flange can be moved to allow for shallow cut outs or left as a flush door, as shown.

Capacity:	1.2 Cu Ft. / 34 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Stainless Steel
Cut Out Dimensions:	24.75" H x 14" W x 14.5 to 16" D (**Moveable Flange**) 628mm H x 355mm W x 368 to 406mm D
Flange Dimensions:	25.5" H x 15.125" W 648mm H x 384mm H
Door Panel Dimensions:	25.5" H x 15.125" W 540mm H x 320mm W
Weight:	37 LBS / 17 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan

Available in AC/DC (Model #R1200ACDC or DC only (Model #R1200DC)

R1600

R1600ACDC - R1600DC - 1.3 Cu. Ft. Refrigerator/Freezer

Capacity:	1.3 Cu Ft. / 36 Liter
Freezer Volume:	0.14 Cu Ft. / 4 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	20.625" H x 15.625" W x 13.75" D 524mm H x 397mm W x 349mm D
Flange Dimensions:	21.375" H x 16.375" W 543mm H x 415mm H
Door Panel Dimensions:	19.75" H x 14.875" W 502mm H x 378mm W
Weight:	36 LBS / 16 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #R1600ACDC or DC only (Model #R1600DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R1900 R1900ACDC - R1900DC - 1.9 Cu. Ft. Refrigerator/Freezer

Capacity:	1.9 Cu Ft. / 54 Liter
Freezer Volume:	0.21 Cu Ft. / 6 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	20.625" H x 15.625" W x 17.75" D 524mm H x 397mm W x 450mm D
Flange Dimensions:	21.375" H x 16.375" W 543mm H x 415mm H
Door Panel Dimensions:	19.75" H x 14.875" W 502mm H x 378mm W
Weight:	36 LBS / 18 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #R1900ACDC or DC only (Model #R1900DC)

R2600 R2600ACDC - R2600DC - 2.4 Cu. Ft. Refrigerator/Freezer

Capacity:	2.4 Cu Ft. / 68 Liter
Freezer Volume:	0.14 Cu Ft. / 4 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	20.25" H x 18" W x 19.50" D 514mm H x 457mm W x 495mm D
Flange Dimensions:	21" H x 18.750" W 533mm H x 440mm H
Door Panel Dimensions:	20.1875" H x 19.50" W 502mm H x 378mm W
Weight:	39 LBS / 18 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #R2600ACDC or DC only (Model #R2600DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R3000

R3000ACDC - R3000DC - 2.5 Cu. Ft. Refrigerator/Freezer

Capacity:	2.5 Cu Ft. / 70 Liter
Freezer Volume:	0.25 Cu Ft. / 7.1 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	24.625" H x 19.25" W x 15.5" D 650mm H x 488mm W x 393mm D
Flange Dimensions:	25.5" H x 20.1875" W 647mm H x 513mm H
Door Panel Dimensions:	24" H x 19" W 609mm H x 482mm W
Weight:	45 LBS / 20.5 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #R3000ACDC or DC only (Model #R3000DC)

The standard black door panels are removable and can be replaced with a custom panel* to match your boats interior.

**Custom Panels can be obtained from lumber yards and various sources and can be cut from material up to 1/4" thick.*

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R2300 R2300ACDC - R2300DC - 2.1 Cu. Ft. Refrigerator/Freezer

Capacity:	2.1 Cu Ft. / 59 Liter
Freezer Volume:	0.25 Cu Ft. / 7.1 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 16.750" W x 14" D 721mm H x 425mm W x 356mm D
Flange Dimensions:	29.250" H x 17.750" W 742mm H x 451mm H
Door Panel Dimensions:	28" H x 16.5625" W 712mm H x 421mm W
Weight:	45 LBS / 20 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.

Available in AC/DC (Model #R2300ACDC or DC only (Model #R2300DC)

R3100 R3100ACDC - R3100DC - 3.0 Cu. Ft. Refrigerator/Freezer

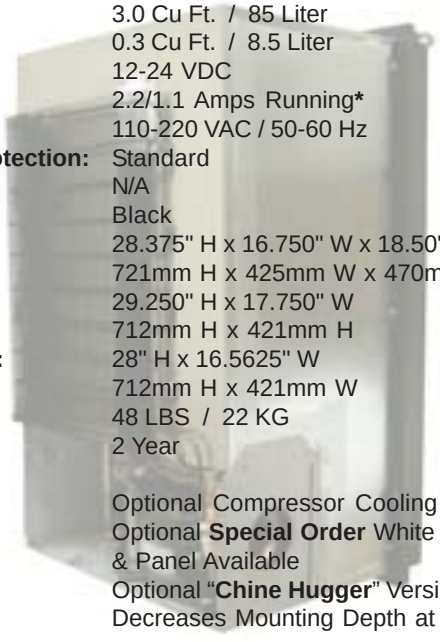

Capacity:	3.0 Cu Ft. / 85 Liter
Freezer Volume:	0.3 Cu Ft. / 8.5 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 16.750" W x 18.50" D 721mm H x 425mm W x 470mm D
Flange Dimensions:	29.250" H x 17.750" W 712mm H x 421mm H
Door Panel Dimensions:	28" H x 16.5625" W 712mm H x 421mm W
Weight:	48 LBS / 22 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.

Available in AC/DC (Model #R3100ACDC or DC only (Model #R3100DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R3800

R3800ACDC - R3800DC - 3.5 Cu. Ft. Refrigerator/Freezer

Capacity:	3.5 Cu Ft. / 100 Liter
Freezer Volume:	0.45 Cu Ft. / 12.7 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	2.2/1.1 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 20.25" W x 18" D 721mm H x 514mm W x 457mm D
Flange Dimensions:	29.250" H x 21.125" W 742mm H x 457mm H
Door Panel Dimensions:	28" H x 19.625" W 712mm H x 499mm W
Weight:	54 LBS / 24.5 KG
Warranty:	2 Year

Options:

Optional Compressor Cooling Fan
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - See Below
Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #R3800ACDC or DC only (Model #R3800DC)

R3803

R3803ACDC - R3803DC - 3.5 Cu. Ft. Refrigerator/Freezer

The Chine Hugger model is designed to fit the curve of the hull. To maximize the size of the refrigerator, the cooling unit is mounted at the back/top of the refrigerator.

The specifications for Model R3803 are the same as for model R3800 above with the exception of the depth. The depth measurement can be broken down into three areas Top, Middle, and Bottom as follows:

Cut Out Depth Model R3803 "Chine Hugger"	
Model	**Depth**
R3803 Top:	**Angle from 17" to 23.5" 432mm to 597mm**
R3803 Middle:	**17" 432mm**
R3803 Bottom:	**10" 254mm**

Available in AC/DC (Model #R3803ACDC or DC only (Model #R3803DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R4500 R4500ACDC - R4500DC - 4.3 Cu. Ft. Refrigerator/Freezer

Capacity:	4.3 Cu Ft. / 122 Liter
Freezer Volume:	0.6 Cu Ft. / 17 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 20.25" W x 21" D 721mm H x 514mm W x 533mm D
Flange Dimensions:	29.250" H x 21.125" W 742mm H x 457mm H
Door Panel Dimensions:	28" H x 19.625" W 712mm H x 499mm W
Weight:	59 LBS / 27 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan Optional **Special Order** White Frame & Panel Available Optional "**Chine Hugger**" Version Available - See Below Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #R4500ACDC or DC only (Model #R4500DC)

R4503 R4503ACDC - R4503DC - 4.3 Cu. Ft. Refrigerator/Freezer

The Chine Hugger model is designed to fit the curve of the hull. To maximize the size of the refrigerator, the cooling unit is mounted at the back/top of the refrigerator.

The specifications for Model R4503 are the same as for model R4500 above with the exception of the depth. The depth measurement can be broken down into three areas Top, Middle, and Bottom as follows:

Cut Out Depth Model R4503 "Chine Hugger"	
Model	**Depth**
R4503 Top:	**Angle from 20" to 27" 508mm to 686mm**
R4503 Middle:	**20" 508mm**
R4503 Bottom:	**13" 330mm**

Available in AC/DC (Model #R4503ACDC or DC only (Model #R4503DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

R5810 R580ACDC - R5810DC - 5.8 Cu. Ft. Refrigerator/Freezer

Capacity:	5.8 Cu Ft. / 164 Liter
Freezer Volume:	0.4 Cu Ft. / 11.3 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Standard
Door Panel:	Stainless
Cut Out Dimensions:	31.875" H x 23.25" W x 23.5" to 22" D**
	809mm H x 590mm W x 597 to 559 mm D**
Flange Dimensions:	32.625" H x 24.5" W
	829mm H x 622mm H
Door Panel Dimensions:	29.625" H x 21.375" W
	752mm H x 543mm W
Weight:	69 LBS / 31 KG
Warranty:	2 Year
Options:	Optional Compressor Cooling Fan
	Optional Flat Cooling Plate - All Refrigerator - No Freezer
	Optional Black Door Panel

**Note: This fridge has an adjustable frame for depth. Remove the 12 frame screws, this will allow the frame to be adjusted in depth.

With this adjustment the door will move forward to minimize depth behind flange. This allows for applications which has depth challenges.

The frame has a 1/2 flange on the left and right side and a 3/16 flange on the bottom with a 1/2 flange on the top.
By removing the 12 frame screws you can change the mounting flange so the top is 3/16 and the bottom is 1/2.

This allows for lower counter height installations. the mounting flange so the top is 3/16 and the bottom is 1/2.

Available in AC/DC (Model #R5810ACDC or DC only (Model #R5810DC)

All single door refrigerators over 25 inches tall are available without the freezer compartment for an all refrigerator design.

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

RFU6200

RFU6200ACDC - RFU6200DC - 6 Cu. Ft. Refrigerator/Freezer

Capacity:	6 Cu Ft. / 170 Liter	**Cut Out Dimensions:**	47.33" H x 20.25" W x 20.5" D 1203mm H x 514mm W x 521mm D
Freezer Volume:	2.5 Cu Ft. / 71 Liter		
Voltage DC:	12-24 VDC	**Flange Dimensions:**	48.125" H x 21" W 1222mm H x 533mm H
Amperage @ 12 VDC:	5.2/2.6 Amps Running*		
Voltage AC:	110-220 VAC / 50-60 Hz	**Door Panel Dimensions (Fridge):**	28" H x 19.625" W 712mm H x 499mm W
Low Voltage Battery Protection:	Standard		
Compressor Cooling Fan:	Standard	**Door Panel Dimensions (Frzr):**	17.25" H x 19.625" W 438mm H x 498mm W
Light:	Standard		
Door Panel:	Black	**Weight:**	93 LBS / 42 KG
		Warranty:	2 Year

Options: Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #RFU6200ACDC or DC only (Model #RFU6200DC)

© Sure Marine Service

RFU6800

RFU6800ACDC - RFU6800DC - 6.8 Cu. Ft. Refrigerator/Freezer

Capacity:	6.8 Cu Ft. / 193 Liter	**Cut Out Dimensions:**	47.33" H x 20.25" W x 21.5" D
Freezer Volume:	2.5 Cu Ft. / 71 Liter		1203mm H x 514mm W x 546mm D
Voltage DC:	12-24 VDC	**Flange Dimensions:**	48.125" H x 21" W
Amperage @ 12 VDC:	5.2/2.6 Amps Running*		1222mm H x 533mm H
Voltage AC:	110-220 VAC / 50-60 Hz	**Door Panel Dimensions (Fridge):**	28" H x 19.625" W
Low Voltage Battery Protection:	Standard		712mm H x 499mm W
Compressor Cooling Fan:	Standard	**Door Panel Dimensions (Frzr):**	17.25" H x 19.625" W
Light:	Standard		438mm H x 498mm W
Door Panel:	Black	**Weight:**	93 LBS / 42 KG
		Warranty:	2 Year

Options: Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #RFU6800ACDC or DC only (Model #RFU6800DC)

© Sure Marine Service

RFU8320 RFU8320ACDC - RFU8320DC - 7.3 Cu. Ft. Refrigerator/Freezer

Capacity:	7.3 Cu Ft. / 206 Liter	**Cut Out Dimensions:**	45.5" H x 23.25" W x 21.75" D 1155mm H x 591mm W x 552mm D
Freezer Volume:	1.6 Cu Ft. / 45 Liter		
Voltage DC:	12-24 VDC	**Flange Dimensions:**	46" H x 24.3125" W 1168mm H x 618mm H
Amperage @ 12 VDC:	5.2/2.6 Amps Running*		
Voltage AC:	110-220 VAC / 50-60 Hz	**Door Panel Dimensions (Fridge):**	29.625" H x 21.375" W 752mm H x 543mm W
Low Voltage Battery Protection:	Standard		
Compressor Cooling Fan:	Standard	**Door Panel Dimensions (Frzr):**	13.25" H x 21.375" W 336mm H x 543mm W
Light:	Standard		
Door Panel:	Black	**Weight:**	95 LBS / 43 KG
		Warranty:	2 Year

Options: Specify Right or Left Hand Opening On This Model.

Available in AC/DC (Model #RFU8320ACDC or DC only (Model #RFU8320DC)

© Sure Marine Service

RFU8220

RFU8220ACDC - RFU8220DC - 7.3 Cu. Ft. Refrigerator/Freezer

Capacity:	7.3 Cu Ft. / 206 Liter	**Cut Out Dimensions:**	52.875" H x 23.25" W x 19.5" D
Freezer Volume:	1.6 Cu Ft. / 45 Liter		1343mm H x 591mm W x 495mm D
Voltage DC:	12-24 VDC	**Flange Dimensions:**	53.375" H x 24.75" W
Amperage @ 12 VDC:	5.2/2.6 Amps Running*		1356mm H x 629mm H
Voltage AC:	110-220 VAC / 50-60 Hz	**Door Panel Dimensions (Fridge):**	29.625" H x 21.375" W
Low Voltage Battery Protection:	Standard		752mm H x 543mm W
Compressor Cooling Fan:	Standard	**Door Panel Dimensions (Frzr):**	13.25" H x 21.375" W
Light:	Standard		336mm H x 543mm W
Door Panel:	Black	**Weight:**	95 LBS / 43 KG
		Warranty:	2 Year

Options: Specify Right or Left Hand Opening On This Model.

The RFU8220 Ventilates From the Front. No Additional Ventilation is Required.

Available in AC/DC (Model #RFU8220ACDC

© Sure Marine Service

RFU9000

RFU9000ACDC - RFU9000DC - 9.1 Cu. Ft. Refrigerator/Freezer

Capacity:	9.1 Cu Ft. / 258 Liter	**Cut Out Dimensions:**	52.875" H x 23.25" W x 22.75" D
Freezer Volume:	2.5 Cu Ft. / 71 Liter		1343mm H x 591mm W x 578mm D
Voltage DC:	12-24 VDC	**Flange Dimensions:**	53.375" H x 24.75" W
Amperage @ 12 VDC:	5.2/2.6 Amps Running*		1356mm H x 629mm H
Voltage AC:	110-220 VAC / 50-60 Hz	**Door Panel Dimensions (Fridge):**	29.625" H x 21.375" W
Low Voltage Battery Protection:	Standard		752mm H x 543mm W
Compressor Cooling Fan:	Standard	**Door Panel Dimensions (Frzr):**	13.25" H x 21.375" W
Light:	Standard		336mm H x 543mm W
Door Panel:	Black	**Weight:**	95 LBS / 43 KG
		Warranty:	2 Year

Options: Specify Right or Left Hand Opening On This Model.

The RFU9000 Ventilates From the Front. No Additional Ventilation is Required.

Available in AC/DC (Model #RFU9000ACDC or DC only (Model #RFU9000DC)

© Sure Marine Service

RS4600

RS4600ACDC - RS4600DC - 4.2 Cu. Ft. Refrigerator Only

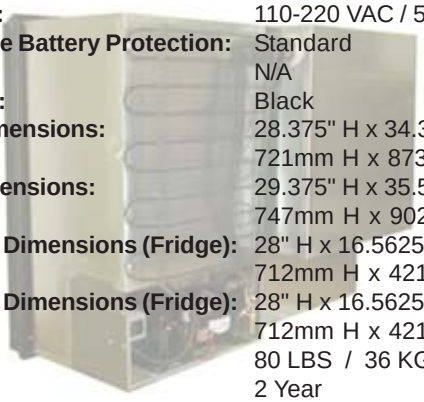

Capacity:	4.2 Cu Ft. / 119 Liter
Freezer Volume:	0.5 Cu Ft. / 14.1 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	N/A
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 34.375" W x 14" D 721mm H x 873mm W x 356mm D
Flange Dimensions:	29.375" H x 35.5" W 747mm H x 902mm H
Door Panel Dimensions (Fridge):	28" H x 16.5625" W 712mm H x 421mm W
Door Panel Dimensions (Fridge):	28" H x 16.5625" W 712mm H x 421mm W
Weight:	80 LBS / 36 KG
Warranty:	2 Year

Options:
Optional Compressor Cooling Fan
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.
Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #RS4600ACDC or DC only (Model #RS4600DC)

RS6100

RS6100ACDC - RS6100DC - 5.6 Cu. Ft. Refrigerator Only

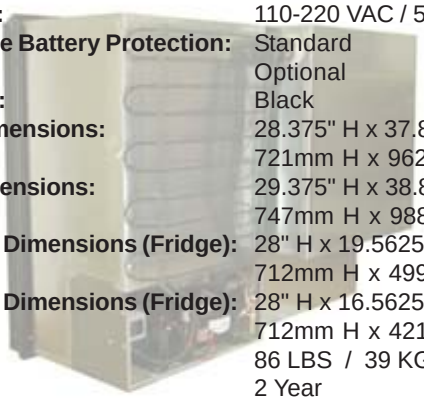

Capacity:	5.6 Cu Ft. / 159 Liter
Freezer Volume:	0.7 Cu Ft. / 19.8 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 37.875" W x 16.5" D 721mm H x 962mm W x 419mm D
Flange Dimensions:	29.375" H x 38.875" W 747mm H x 988mm H
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Door Panel Dimensions (Fridge):	28" H x 16.5625" W 712mm H x 421mm W
Weight:	86 LBS / 39 KG
Warranty:	2 Year

Options:
Optional Compressor Cooling Fan
Optional **Flush Mounting Frame Kit**
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.
Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #RS6100ACDC or DC only (Model #RS6100DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

RS6500 RS6500ACDC - RS6500DC - 6.4 Cu. Ft. Refrigerator Only

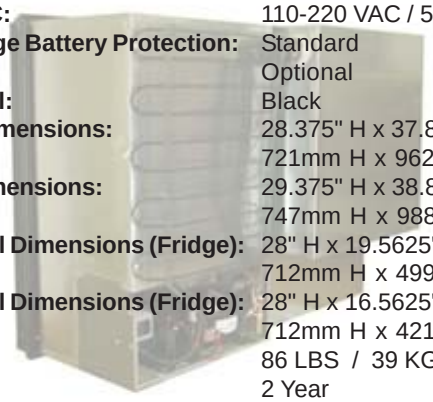

Capacity:	6.4 Cu Ft. / 181 Liter
Freezer Volume:	0.7 Cu Ft. / 19.8 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 37.875" W x 19.25" D 721mm H x 962mm W x 489mm D
Flange Dimensions:	29.375" H x 38.875" W 747mm H x 988mm H
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Door Panel Dimensions (Fridge):	28" H x 16.5625" W 712mm H x 421mm W
Weight:	86 LBS / 39 KG
Warranty:	2 Year

Options:
Optional Compressor Cooling Fan
Optional **Flush Mounting Frame Kit**
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.
Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #RS6500ACDC or DC only (Model #RS6500DC)

RS7600 RS7600ACDC - RS7600DC - 7 Cu. Ft. Refrigerator Only

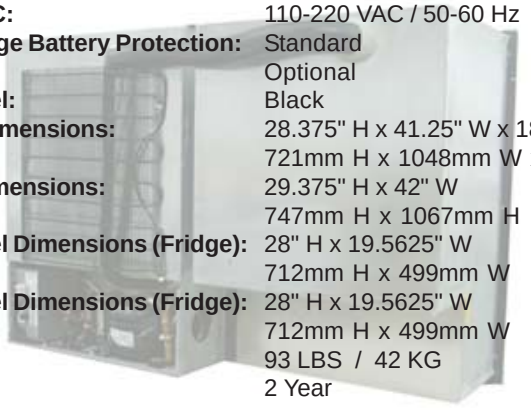

Capacity:	7 Cu Ft. / 198 Liter
Freezer Volume:	0.8 Cu Ft. / 122.6 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 41.25" W x 18.5" D 721mm H x 1048mm W x 470mm D
Flange Dimensions:	29.375" H x 42" W 747mm H x 1067mm H
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Weight:	93 LBS / 42 KG
Warranty:	2 Year

Options:
Optional Compressor Cooling Fan
Optional **Flush Mounting Frame Kit**
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.
Optional Flat Cooling Plate - All Refrigerator - No Freezer

Available in AC/DC (Model #RS7600ACDC or DC only (Model #RS7600DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

RFS6100

RFS6100ACDC - RFS6100DC - 4.2 Cu. Ft. Refrigerator/Freezer

Capacity:	5.6 Cu Ft. / 159 Liter
Freezer Volume:	2.1 Cu Ft. / 59 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 37.875" W x 16.5" D 721mm H x 962mm W x 419mm D
Flange Dimensions:	29.375" H x 38.875" W 747mm H x 988mm H
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Door Panel Dimensions (Frzr):	28" H x 16.5625" W 712mm H x 421mm W
Weight:	80 LBS / 37 KG
Warranty:	2 Year

Freezer is on the Right

Options:
Optional Compressor Cooling Fan
Optional **Flush Mounting Frame Kit**
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.

Available in AC/DC (Model #RFS6100ACDC or DC only (Model #RFS6100DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

RFS6500

RFS6500ACDC - RFS6500DC - 6.4 Cu. Ft. Refrigerator/Freezer

Capacity:	6.4 Cu Ft. / 181 Liter
Freezer Volume:	2.1 Cu Ft. / 59 Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Optional
Door Panel:	Black
Cut Out Dimensions:	28.375" H x 37.875" W x 19.25" D 721mm H x 962mm W x 489mm D
Flange Dimensions:	29.375" H x 38.875" W 747mm H x 988mm H
Door Panel Dimensions (Fridge):	28" H x 19.5625" W 712mm H x 499mm W
Door Panel Dimensions (Frzr):	28" H x 16.5625" W 712mm H x 421mm W
Weight:	86 LBS / 39 KG
Warranty:	2 Year

Freezer is on the Right

Options: Optional Compressor Cooling Fan
Optional **Flush Mounting Frame Kit**
Optional **Special Order** White Frame & Panel Available
Optional "**Chine Hugger**" Version Available - Decreases Mounting Depth at the Base by Mounting the Compressor Higher.

Available in AC/DC (Model #RFS6500ACDC or DC only (Model #RFS6500DC)

RFS7501

RFS7600ACDC - RFS7600DC - 7.5 Cu. Ft. Refrigerator/Freezer

Capacity:	7.5 Cu Ft. / 212 Liter
Freezer Volume:	2 Cu Ft. / 57Liter
Voltage DC:	12-24 VDC
Amperage @ 12 VDC:	4.4/2.2 Amps Running*
Voltage AC:	110-220 VAC / 50-60 Hz
Low Voltage Battery Protection:	Standard
Light:	Standard
Door Panel:	Black
Cut Out Dimensions:	34" H x 28" W x 22" D 864mm H x 711mm W x 559mm D
Flange Dimensions:	35" H x 29" W 889mm H x 737mm H
Door Panel Dimensions (Frzr):	33.75" H x 9.5625" W 857mm H x 236mm W
Door Panel Dimensions (Fridge):	33.75" H x 17.875" W 857mm H x 454mm W
Weight:	86 LBS / 39 KG
Warranty:	2 Year

Freezer is on the Left

Options: Optional Compressor Cooling Fan
Optional **Special Order** White Frame & Panel Available

Available in AC/DC (Model #RFS7501ACDC or DC only (Model #RFS7501DC)

***Note:** The amperage listed is while the unit is running. To determine 24hr consumption; calculate the run time for 24hrs and multiply this by the listed amperage. Listed amperage will change with ambient temperature and unit door openings.

© Sure Marine Service

Vitrifrigo

The **Sea Classic** Series offers a complete range able to provide any demand in space or capacity requirements.

Ergonomic, silent, intuitive and safe, these units are able to guarantee the best cooling onboard: years of use on various types and sizes of boats have included these classic refrigerators and freezers.

Sea Classic refrigerators with a built-in cooling unit are the best choice where space is available, behind the refrigerator, to guarantee suitable unit ventilation.

Features:

- **New** "SMART" locking system
- **New** LED light system. High brightness gives the best internal visibility & lowest energy consumption
- **New** adjustable flange for **Surface or Flush Mounting** ***(except DP150i & DP2600i)***
- Operates with a reliable & quiet Danfosscompressor using the environmentally safe R134a refrigerant.
- Rigid external chassis with extra thick, highly efficient poly-urethane foam insulation throughout.
- Fan cooled air condensing units to provide better heat transfer, higher efficiencies, increased interior volumes and longer life.
- Door panels are easily interchanged to match specific interior applications.
- Adjustable shelving for efficient use of interior space and storage.
- Magnetic door seals are standard on all non-portable units.

Model

C39iBP4-F-1 - 1.3 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	1.3
Freezer compartment (Cu Ft)	0.1
Freezer internal size	
Height (Inches)	2.8
Width (Inches)	9.7
Depth (Inches)	8.3
Weight	
Lbs	40.8 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	2.58 a @ 12 Vdc
Nominal input (W)	31 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.44 A @ 115 Vac
Nominal input (W)	31 W

Mounting options — Adjustable flange for Surface or Flush Mounting

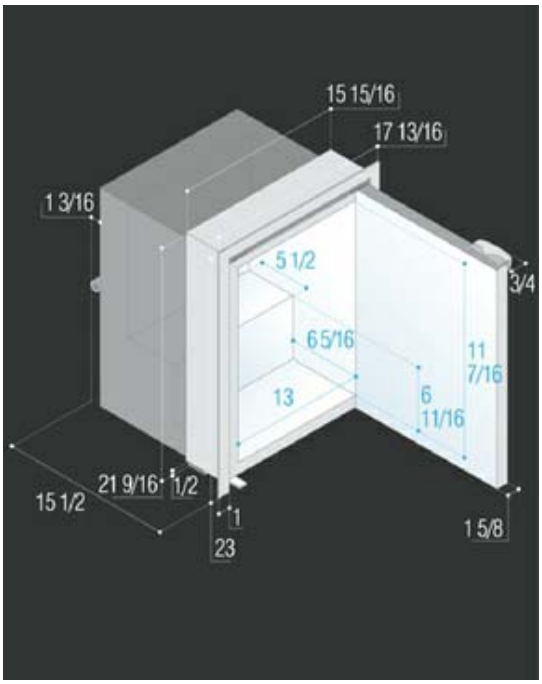

© Sure Marine Service

Model

C51iBD4-F-1 - 1.8 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	1.8
Freezer compartment (Cu Ft)	0.1
Freezer internal size	
Height (Inches)	2.8
Width (Inches)	9.7
Depth (Inches)	9.1
Weight	
Lbs	39.7 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Adjustable flange for Surface or Flush Mounting

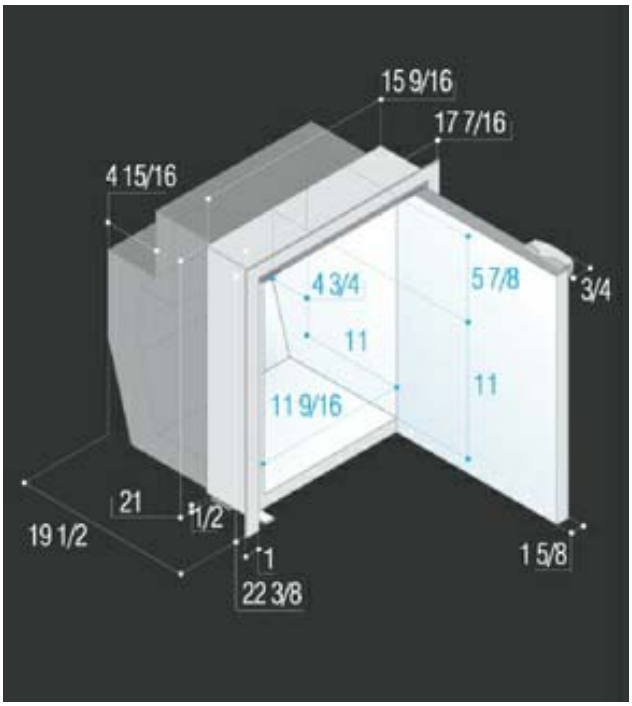

Model

C60iBD4-F-1 - 2.1 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	2.1
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	4.1
Width (Inches)	15.4
Depth (Inches)	9.8
Weight	
Lbs	46.7 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Adjustable flange for Surface or Flush Mounting

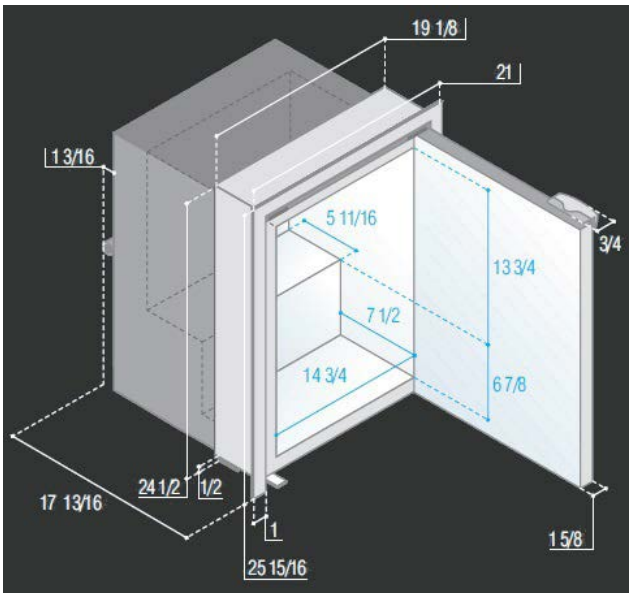

© Sure Marine Service

Model

C62iBD4-F-1 - 2.2 Cu. Ft. Refrigerator/Freezer

Technical data

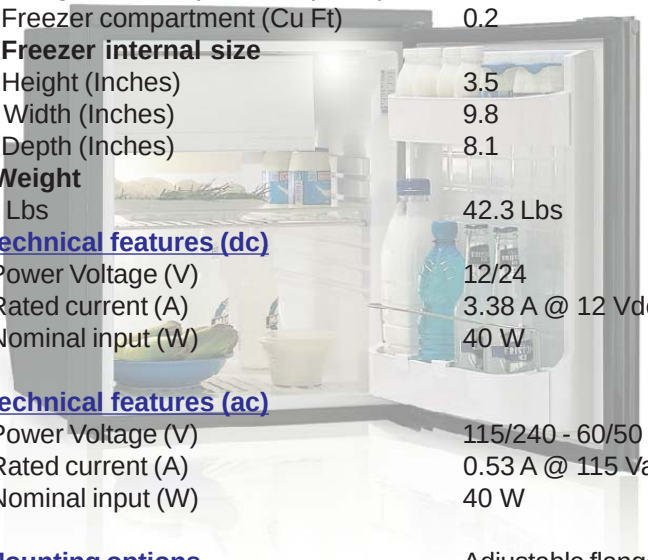

Volume	
Refrigerator compartment (Cu Ft)	2.2
Freezer compartment (Cu Ft)	0.2
Freezer internal size	
Height (Inches)	3.5
Width (Inches)	9.8
Depth (Inches)	8.1
Weight	
Lbs	42.3 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Adjustable flange for Surface or Flush Mounting

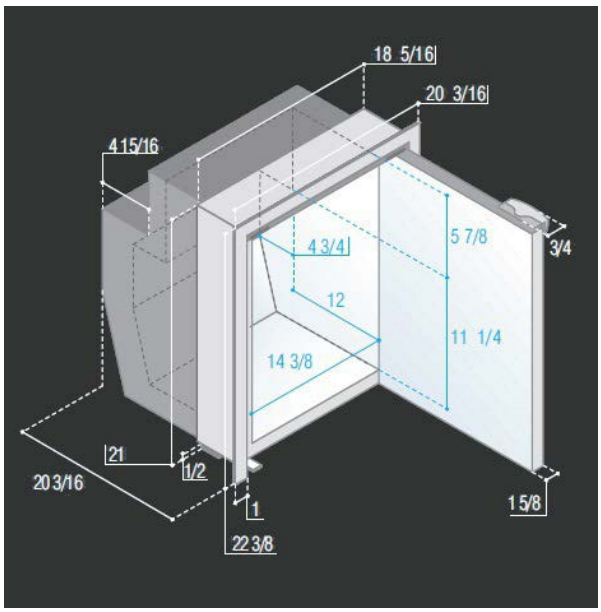

Model

C85iBD4-F-1 - 3.2 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	3.2
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	5.1
Width (Inches)	15.6
Depth (Inches)	9.8
Weight	
Lbs	58.4 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115Vac
Nominal input (W)	40 W
Mounting options	Adjustable flange for Surface or Flush Mounting

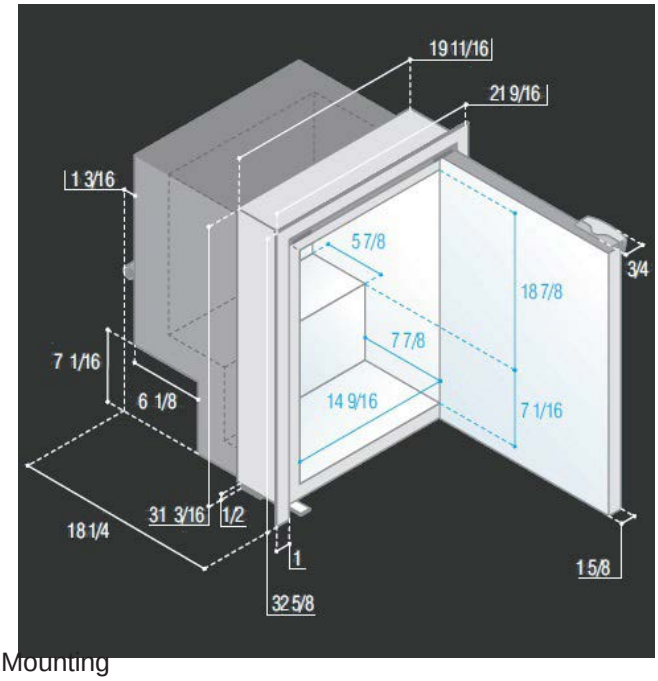

© Sure Marine Service

Model

C90iBD4-F-1 - 3.1 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	3.1
Freezer compartment (Cu Ft)	0.3
Freezer internal size	
Height (Inches)	5
Width (Inches)	15.4
Depth (Inches)	7.9
Weight	
Lbs	51.8 Lbs

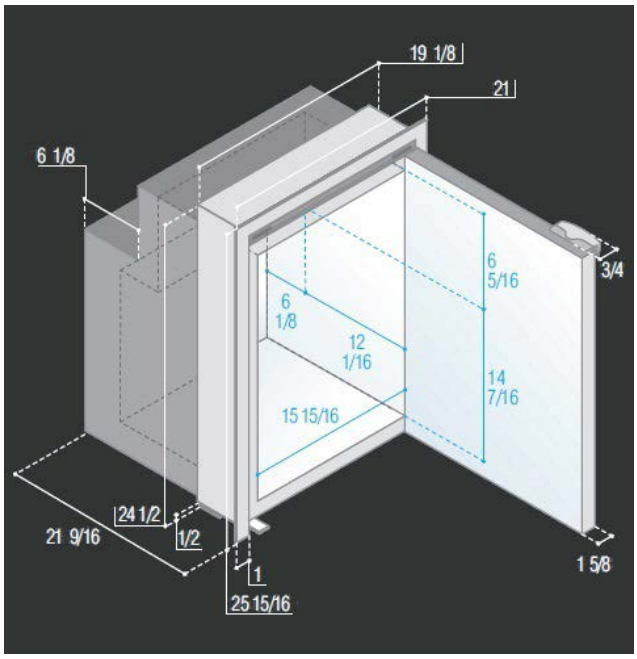

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W

Mounting options Adjustable flange for Surface or Flush Mounting

Model

C115iBD4-F-1 - 4.2 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.2
Freezer compartment (Cu Ft)	0.6
Freezer internal size	
Height (Inches)	4.7
Width (Inches)	16.5
Depth (Inches)	13.4
Weight	
Lbs	55 Lbs

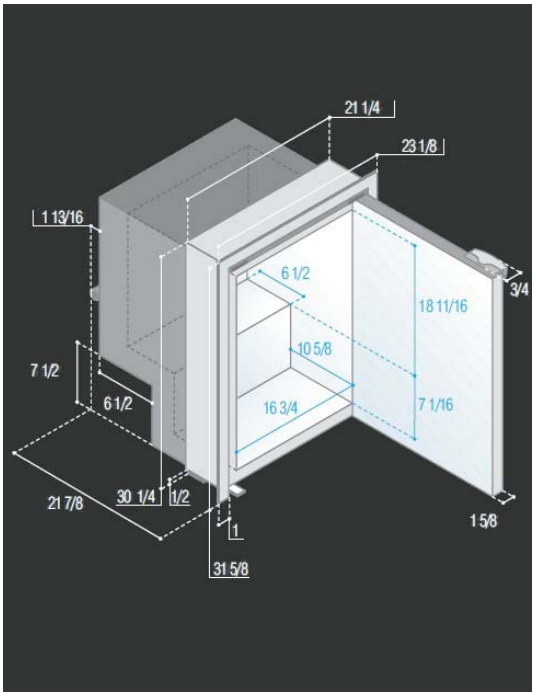

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	45 W

Mounting options Adjustable flange for Surface or Flush Mounting

© Sure Marine Service

Model

C115iBP4-F-1 - 4.2 Cu. Ft. Refrigerator Only

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.2
Freezer compartment (Cu Ft)	NONE
Freezer internal size	
Height (Inches)	n/a
Width (Inches)	n/a
Depth (Inches)	n/a
Weight	
Lbs	55 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	45 W
Mounting options	Adjustable flange for Surface or Flush Mounting

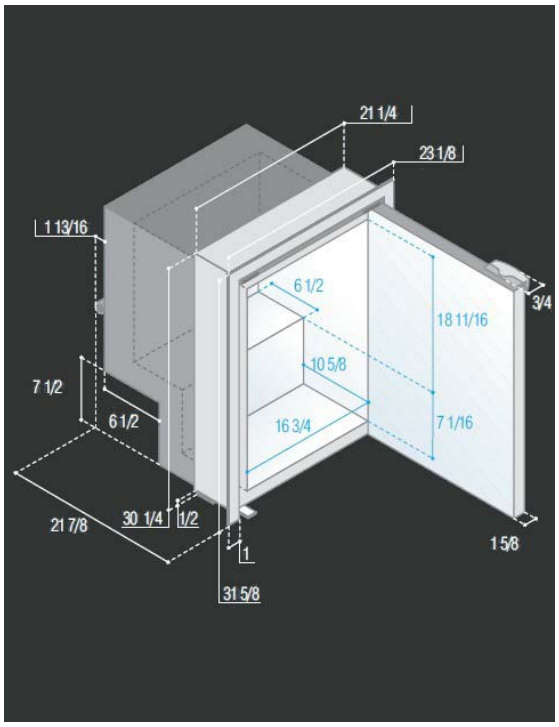

Model

DP150iBD4-S - 5.3 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.2
Freezer compartment (Cu Ft)	1.1
Freezer internal size	
Height (Inches)	7.5
Width (Inches)	15.1
Depth (Inches)	15
Weight	
Lbs	94.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	2.58 A @ 12 Vdc
Nominal input (W)	31 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.44 A @ 115 Vac
Nominal input (W)	31 W
Mounting options	Surface Mount

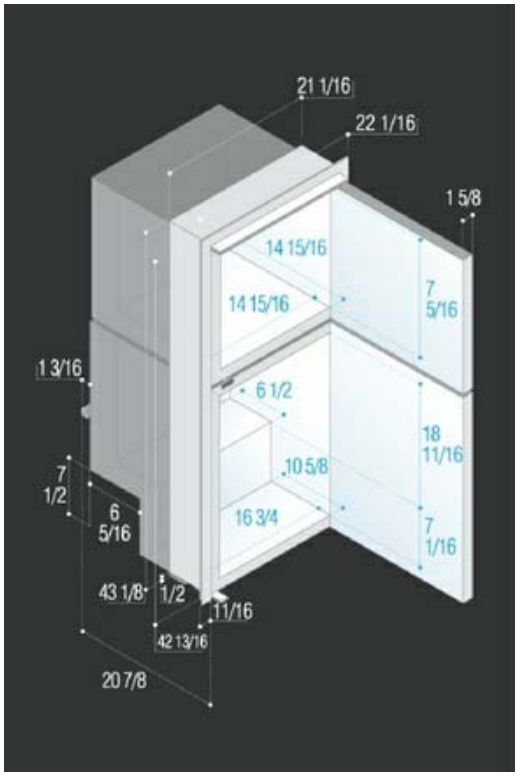

© Sure Marine Service

Model

DP2600iBD4-F-2 - 8.1 Cu. Ft. Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	6
Freezer compartment (Cu Ft)	2.1
Freezer internal size	
Height (Inches)	13.6
Width (Inches)	18.7
Depth (Inches)	15
Weight	
Lbs	136.7 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	5.38 A @ 12 Vdc
Nominal input (W)	65 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.76 A @ 115 Vac
Nominal input (W)	65 W

Mounting options

Flush flange

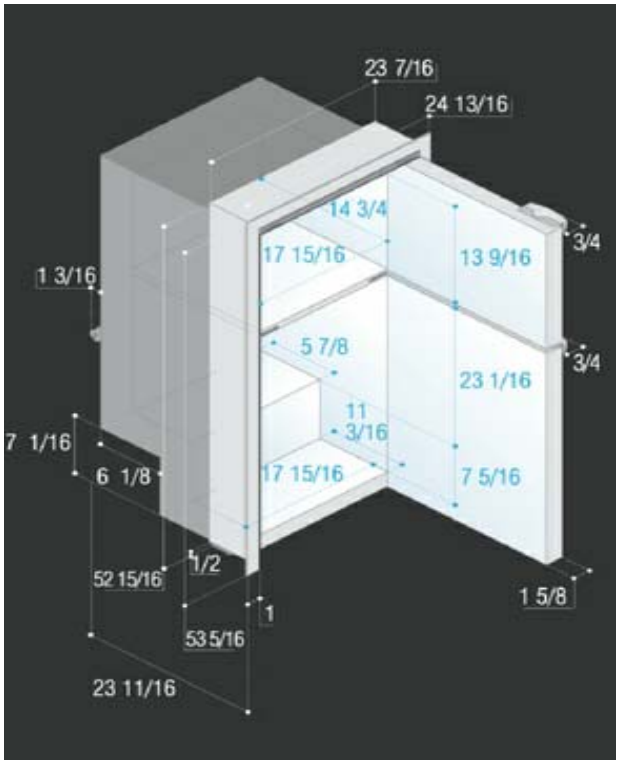

© Sure Marine Service

Sea Classic refrigerators with remote cooling units provide bigger internal volume, remoting the installation of the cooling unit in a compartment or locker, optimizing space and performance. Some ventilation to the unit is always recommended.

Model

C130RBD4-F-1 - 4.7 Cu. Ft. Refrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.7
Freezer compartment (Cu Ft)	0.6
Freezer internal size	
Height (Inches)	4.7
Width (Inches)	16.5
Depth (Inches)	13.4
Weight	
Lbs	62.6 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	43 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	43 W

Mounting options

Adjustable flange for Surface or Flush Mounting

Cooling unit may be mounted up to 4 feet away. Cooling unit is connected permanently (no quick disconnects) to refrigerator box via soft copper refrigeration tubing. Care must be taken during installation to not kink the refrigerant lines.

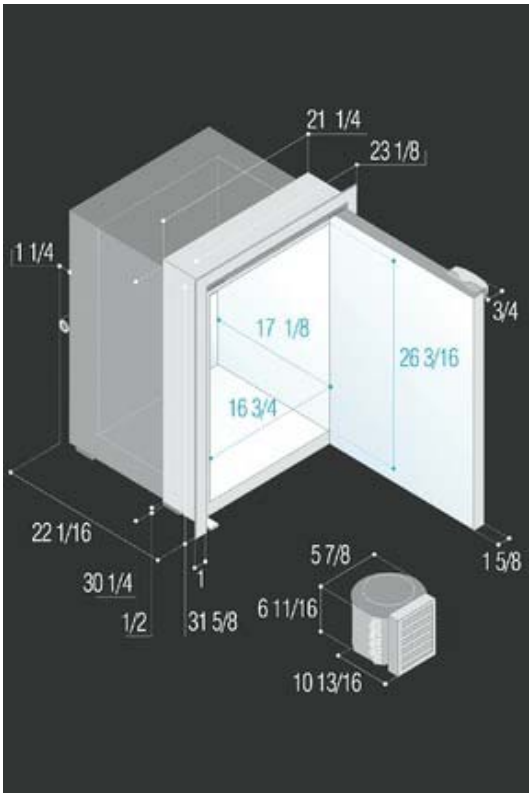

© Sure Marine Service

Model

C42RBD4-F-1 - 1.4 Cu. Ft. Refrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	1.4
Freezer compartment (Cu Ft)	0.1
Freezer internal size	
Height (Inches)	2.8
Width (Inches)	9.7
Depth (Inches)	8.3
Weight	
Lbs	37.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	2.58 A @ 12 Vdc
Nominal input (W)	31 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.44 A @ 115 Vac
Nominal input (W)	31 W
Mounting options	Adjustable flange for Surface or Flush Mounting

With Remote Cooling Unit

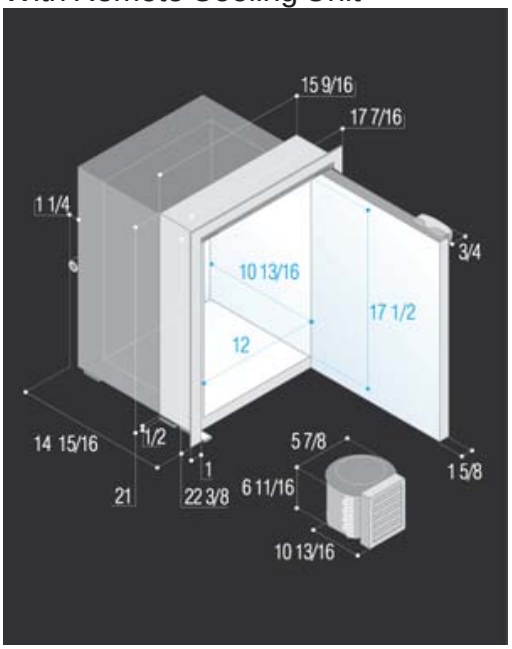

Cooling Unit May Be Located Up To 4 Feet Away

Model

C75RBD4-F-1 - 2.6 Cu. Ft. Refrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	2.6
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	4.1
Width (Inches)	15.4
Depth (Inches)	9.8
Weight	
Lbs	37.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	2.58 A @ 12 Vdc
Nominal input (W)	31 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.44 A @ 115 Vac
Nominal input (W)	31 W
Mounting options	Adjustable flange for Surface or Flush Mounting

With Remote Cooling Unit

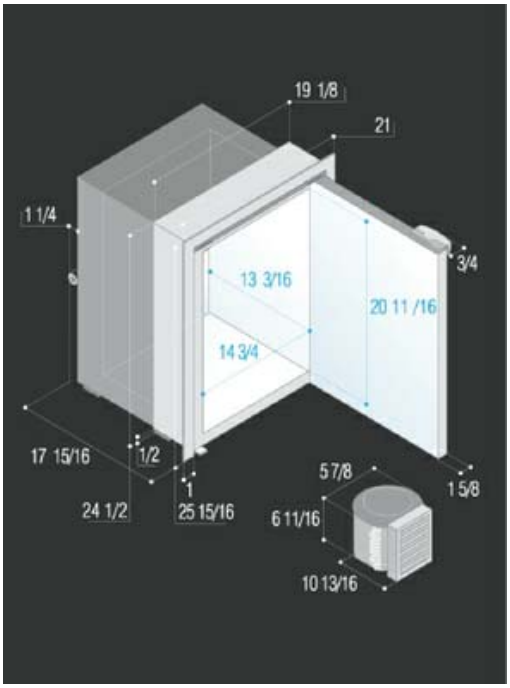

Cooling Unit May Be Located Up To 4 Feet Away

© Sure Marine Service

Vitrifrigo

The **Sea Steel** range Provides any demand on space and capacity.

Designed to convert the refrigerator into a fine piece of furniture, it expresses a sober and refined style, able to interpret your boat's unique character.

Eronomic, silent, intuitive and safe, these units are able to guarantee the best cooling onboard: years of use on various types and sizes of boats have included these classic refrigerators and freezers.

Sea Classic refrigerators with a built-in cooling unit are the best choice where space is available, behind the refrigerator, to guarantee suitable unit ventilation.

Features:

- Includes interior lighting
- Operates with a reliable and quiet Danfoss 12/24 volt compressor using the environmentally safe R134a refrigerant.
- Rigid external chassis with extra thick, highly efficient poly-urethane foam insulation throughout.
- Fan cooled air condensing units to provide better heat transfer, higher efficiencies, increased interior volumes and longer life.
- **Stainless** mounting flange and **stainless** wrapped doors.
- Standard with a positive locking mechanism that easily slides for opening and closing.
- Adjustable shelving for efficient use of interior space and storage.
- Magnetic door seals are standard on all non-portable units.

Model

C51iXD4-F - 1.8 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	1.8
Freezer compartment (Cu Ft)	0.1
Freezer internal size	
Height (Inches)	2.8
Width (Inches)	9.7
Depth (Inches)	9.1
Weight	
Lbs	42.3 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W

Mounting options Flush flange

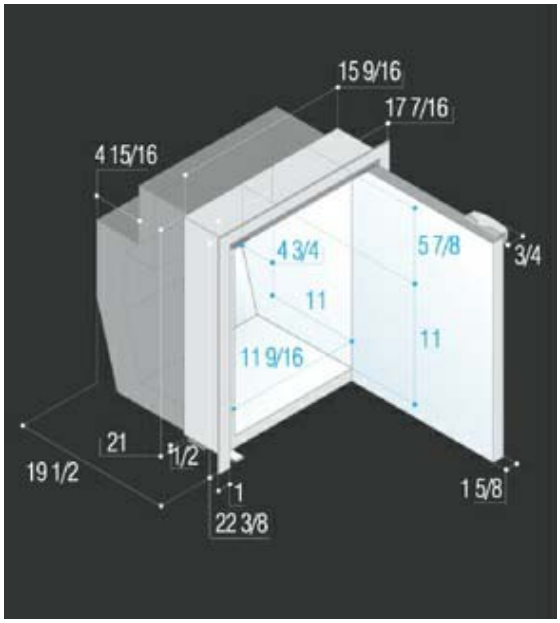

© Sure Marine Service

Model

C60iXD4-F - 2.1 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	2.1
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	4.1
Width (Inches)	15.4
Depth (Inches)	9.8
Weight	
Lbs	48.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Flush flange

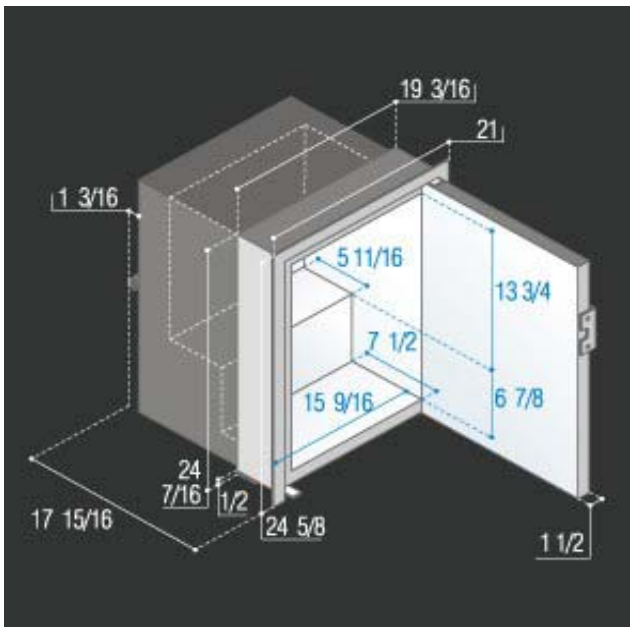

Model

C62iXD4-F - 2.2 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

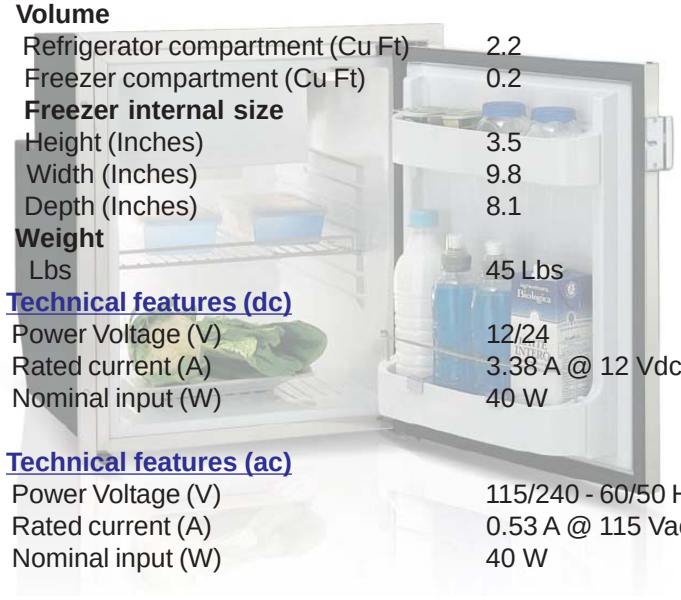

Volume	
Refrigerator compartment (Cu Ft)	2.2
Freezer compartment (Cu Ft)	0.2
Freezer internal size	
Height (Inches)	3.5
Width (Inches)	9.8
Depth (Inches)	8.1
Weight	
Lbs	45 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.38 A @ 12 Vdc
Nominal input (W)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Flush flange

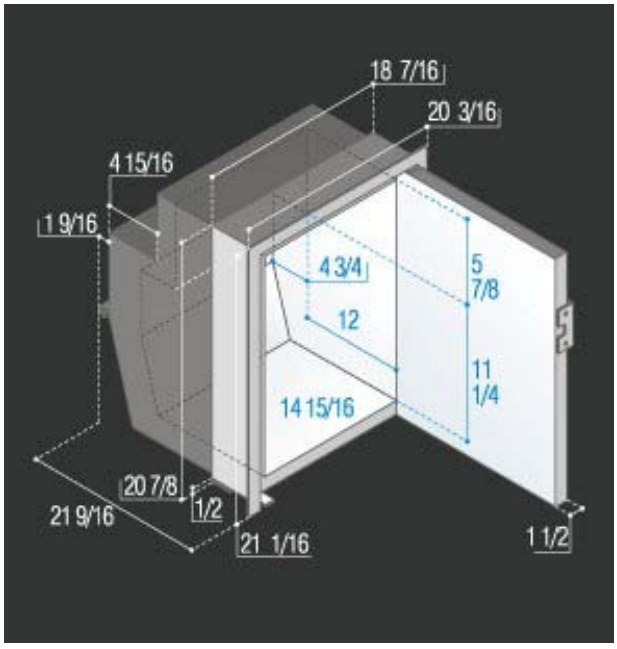

© Sure Marine Service

Model

C85iXD4-F - 3.2 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	3.2
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	5.1
Width (Inches)	15.6
Depth (Inches)	9.8
Weight	
Lbs	59.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.78 a @ 12 vDC
Nominal input (W)	45 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 a @ 115 Vac
Nominal input (W)	45 W
Mounting options	Flush flange

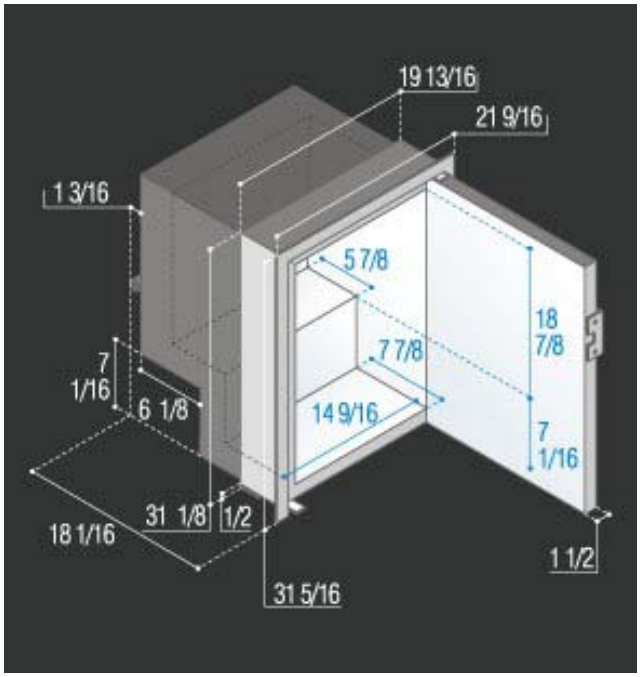

Model

C90iXD4-F - 3.1 Cu. Ft. Stainless Refrigerator/Freezer

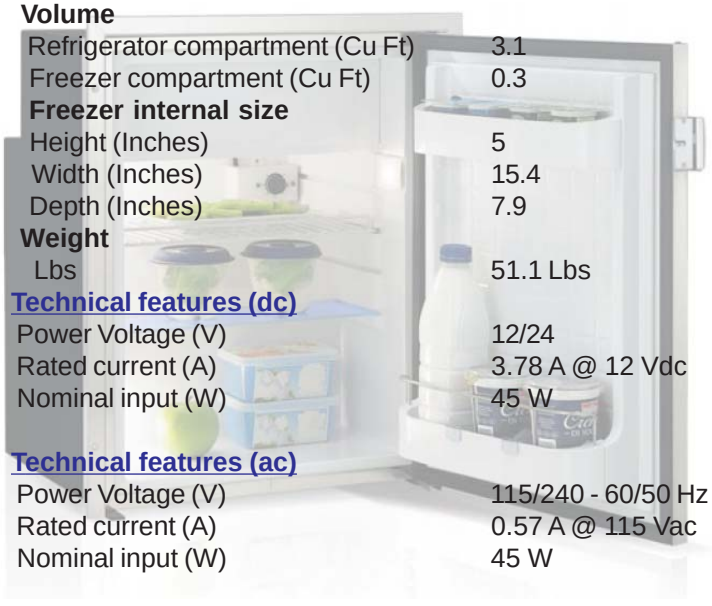

Technical data

Volume	
Refrigerator compartment (Cu Ft)	3.1
Freezer compartment (Cu Ft)	0.3
Freezer internal size	
Height (Inches)	5
Width (Inches)	15.4
Depth (Inches)	7.9
Weight	
Lbs	51.1 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	45 W
Mounting options	Flush flange

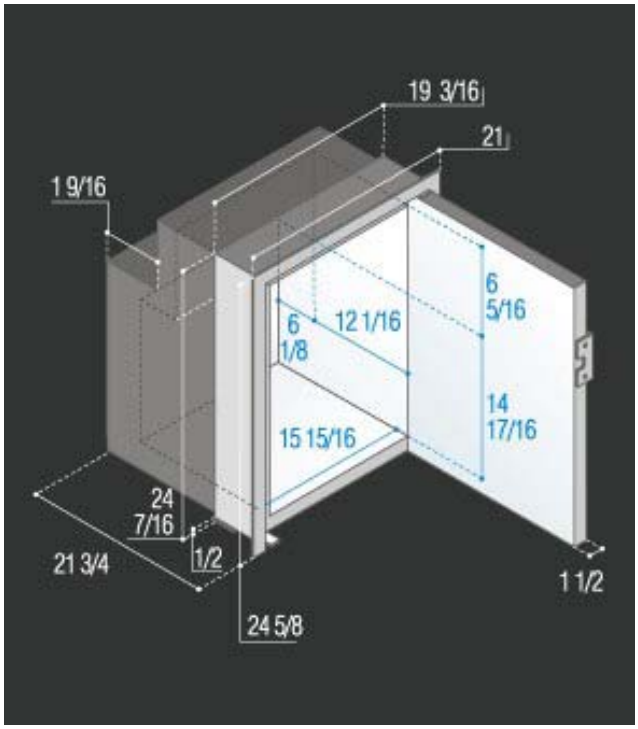

© Sure Marine Service

Model

C115iXD4-F - 4.2 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.2
Freezer compartment (Cu Ft)	0.6
Freezer internal size	
Height (Inches)	4.7
Width (Inches)	16.5
Depth (Inches)	13.4
Weight	
Lbs	66.1 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	45 W
Mounting options	Flush flange

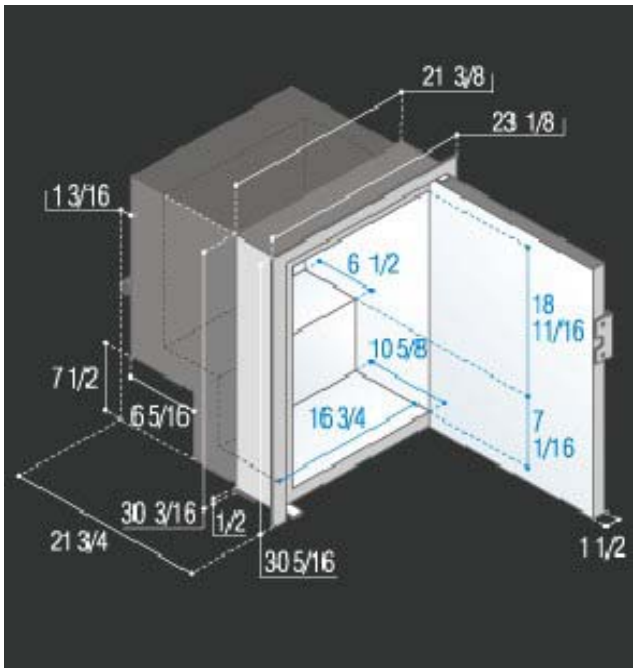

Model

C115iXP4-F - 4.2 Cu. Ft. Stainless Refrigerator Only

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.2
Freezer compartment (Cu Ft)	NONE
Freezer internal size	
Height (Inches)	n/a
Width (Inches)	n/a
Depth (Inches)	n/a
Weight	
Lbs	66.1 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Mounting options	Flush flange

Refrigerator only

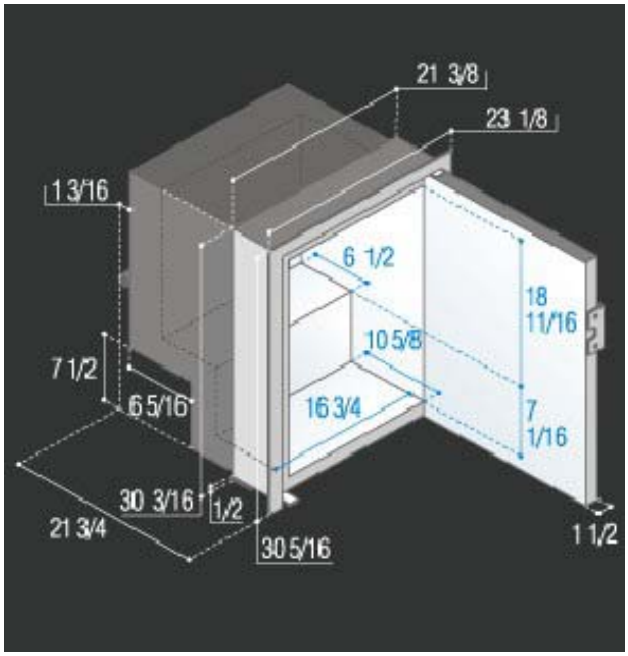

© Sure Marine Service

Model

DP2600iXD4-F-1 - 8.1 Cu. Ft. Stainless Refrigerator/Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	6
Freezer compartment (Cu Ft)	2.1
Freezer internal size	
Height (Inches)	13.6
Width (Inches)	18.7
Depth (Inches)	15
Weight	
Lbs	136.6 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	5.38 A @ 12 Vdc
Nominal input (W)	65 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.76 A @ 115 Vac
Nominal input (W)	65 W

Mounting options

Flush flange

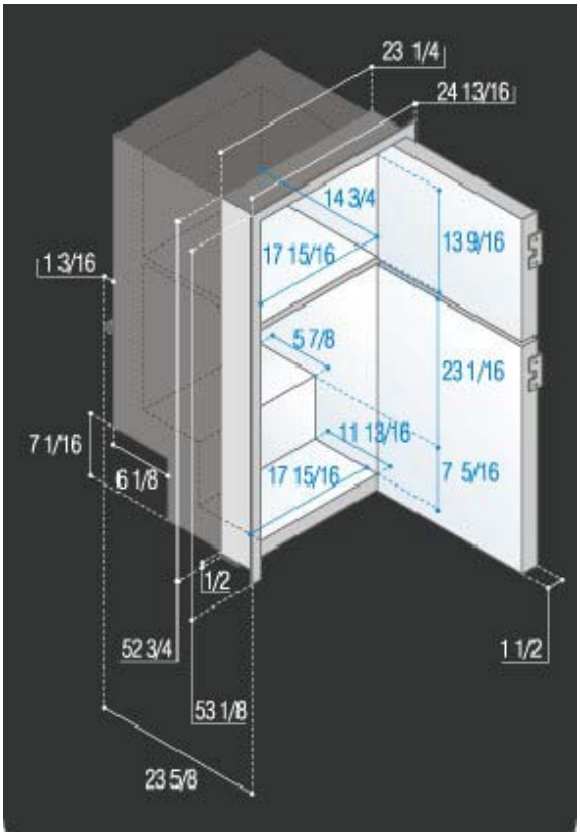

© Sure Marine Service

Sea Steel refrigerators with remote cooling units provide bigger internal volume, remoting the installation of the cooling unit in a compartment or locker, optimizing space and performance. Some ventilation to the unit is always recommended.

Model

C130RXD4-F - 4.7 Cu. Ft. Stainless Refrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	4.7
Freezer compartment (Cu Ft)	0.6
Freezer internal size	
Height (Inches)	4.7
Width (Inches)	16.5
Depth (Inches)	13.4
Weight	
Lbs	68.3 Lbs

Technical features (dc)

Power Voltage (V)	12/24
Rated current (A)	3.78 A @ 12 Vdc
Nominal input (W)	45 W

Technical features (ac)

Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.57 A @ 115 Vac
Nominal input (W)	45 W

Mounting options

Flush flange

Cooling unit may be mounted up to 4 feet away. Cooling unit is connected permanently (no quick disconnects) to refrigerator box via soft copper refrigeration tubing. Care must be taken during installation to not kink the refrigerant lines.

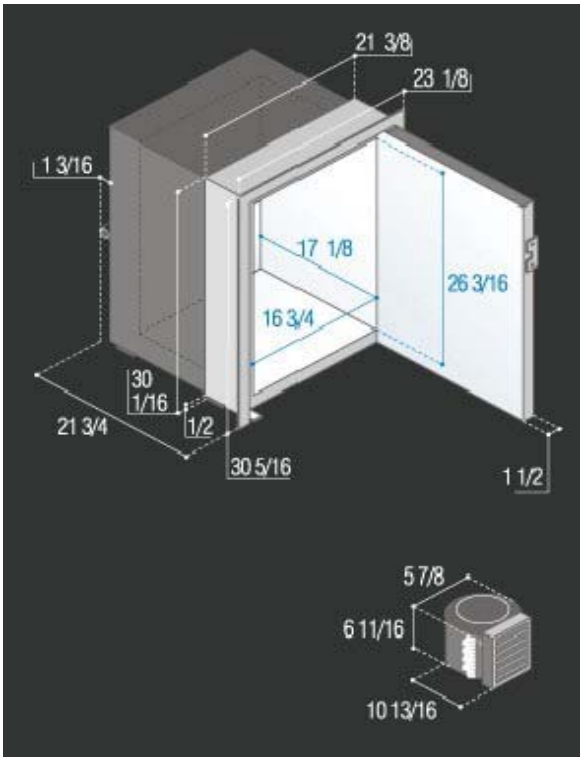

© Sure Marine Service

Model

C42RXD4-F - 1.4 Cu. Ft. StainlessRefrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	1.4
Freezer compartment (Cu Ft)	0.1
Freezer internal size	
Height (Inches)	2.8
Width (Inches)	9.7
Depth (Inches)	8.3
Weight	
Lbs	37.5 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	2.58 A @ 12 Vdc
Nominal input (W)	31 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.44 A @ 115 Vac
Nominal input (W)	31 W
Mounting options	Flush flange

With Remote Cooling Unit

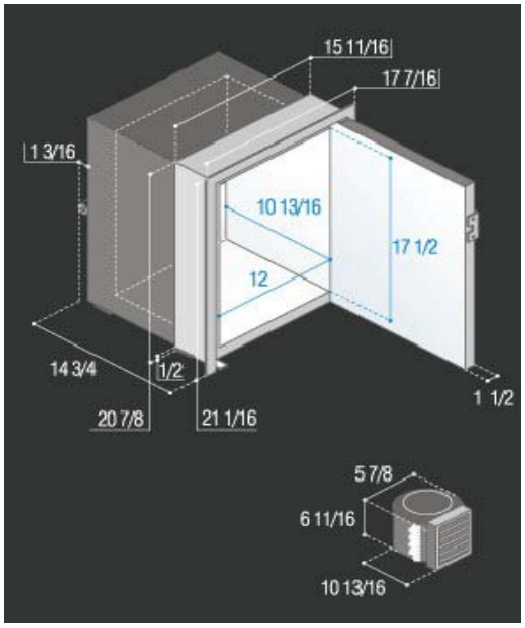

Cooling Unit May Be Located Up To 4 Feet Away

Model

C75RXD4-F - 2.6 Cu. Ft. Stainless Refrigerator / Freezer

Technical data

Volume	
Refrigerator compartment (Cu Ft)	2.6
Freezer compartment (Cu Ft)	0.4
Freezer internal size	
Height (Inches)	4.1
Width (Inches)	15.4
Depth (Inches)	9.8
Weight	
Lbs	50.7 Lbs
Technical features (dc)	
Power Voltage (V)	12/24
Rated current (A)	40 W
Technical features (ac)	
Power Voltage (V)	115/240 - 60/50 Hz
Rated current (A)	0.53 A @ 115 Vac
Nominal input (W)	40 W
Mounting options	Flush flange

With Remote Cooling Unit

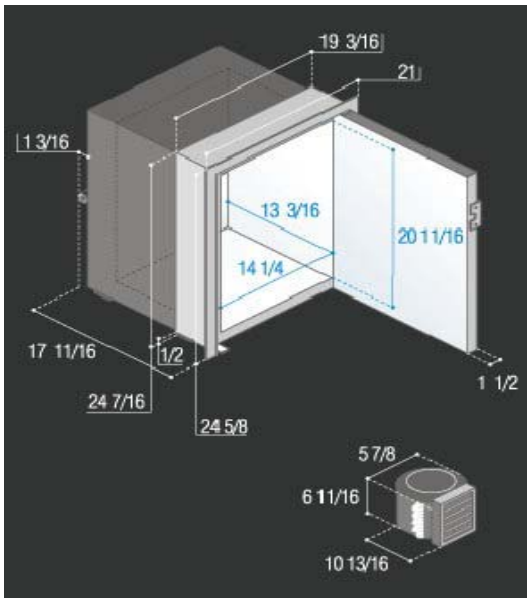

Cooling Unit May Be Located Up To 4 Feet Away

© Sure Marine Service

NOVA KOOL

isotherm
Marine Refrigeration

VITRIFRIGO

Dometic

NORCOLD®

Sure Marine Service, Inc.
5320 28th Ave. N.W.
Seattle, WA 98107
(800) 562-7797 (206) 784-9903

Shop Online:
www.suremarineservice.com